



SUMMARY

INTRODUCTION – CONCEPT

FEATURES

CONSTRUCTION

ENGINE

KEEL

VERSIONS & INTERIOR LAYOUTS CHOICES

UPHOLSTERY CHOICE

HULL AND DECK

MASTS AND RIGGING

SAIL HANDLING

COCKPIT

EXTERNAL CANVAS

ANCHORING, DOCKING AND TENDER

CLIMATE CONTROL AND ELECTRICAL SYSTEMS

SALOON

EQUIPMENT & APPLIANCES

MECHANICAL ACCESSORIES

TV & HIFI

ELECTRONIC PACK

EXTERIOR

HULL AND KEELS: modern and well-balanced

- **Philippe Briand design**
- **Twin rudders** self-aligning roller bearings
- **Integral hard chine** on the hull for increased stability
- **Long waterline** offers performance under sail as well as motoring
- **Moderate freeboard** offers a sleek aesthetic, as do the six hull ports and the chine line
- **Inverted bow**: increases the length of the waterline while improving water penetration
- **Hull cut-out** to refine the height of the freeboard

DECK AND COCKPIT: Well-being, comfort and safety

- **Harken fittings**: winches, blocks and rails
- **Walk around deck**
- **Numerous lockers**: for gas bottles, access the garage, storage on the starboard side
- **Longitudinal garage** including space for the life raft.
- **Sail locker** at the bow, optional **skipper's cabin** or **bow cabin**
- **wide bathing platform with foldable garage door**
- **foldable aft companion way** to give access to the sea and aft platform
- **2 large teak cockpit tables**
- **Flush windows** and **integrated ropes** for aesthetics and for safe walking safety on deck



INTERIOR

The hallmark of Andrew Winch's projects is a **mastery of space**, a meticulous **attention to design, to quality and to every detail**. The spacious living spaces subtly combine **well-being and safety, refinement and relaxation**
→ a harmonious blend designed to provide **exceptional on-board comfort**, worthy of the great yachts.

The Jeanneau Yachts 60 offers a wide choice of different layouts

Front peak with 3 type of accommodation

One or two forward cabins

Galley across the beam in front of the saloon

Saloon with lite version, has several versions to starboard, depending on the

One aft owner's cabin or two aft cabins (VIP and convertible)

Choice of two wood colors

Choice of upholstery

FEATURES



TECHNICAL INFORMATION

Overall Length with Bowsprit	18,28 m / 59'11"
Overall Length	17,41 m / 57'1"
Waterline length	16,82 m / 55'2"
Beam	5.20 m / 17'
Displacement (empty)	20.170 kg / 44.467 lbs
Standard keel draft	2.70 m / 8'10"
Standard keel weight	5,000 kg / 11.023 lbs
Shallow keel draft	2,25 m / 7'4"
Shallow keel weight	5.642 kg / 12.456 lbs

Cabins	3 / 4
Berths	6 to 8
Fuel capacity	318 l / 84 US gal
Water capacity	760 l / 201 US gal
Fridge capacity	219 l / 58 US gal
Standard Yanmar engine	150 CV / 110 kW
Furling Mainsail - Furling mast	71 m² / 764 Sq ft
Mainsail - Classic mast	83,6 m² / 900 Sq ft
Mainsail - Performance mast	90,2 m² / 971 Sq ft
Self tacking jib – Classic & furling masts	57 m² / 613 Sq ft
Furling genoa - Classic & furling masts	78 m² / 839 Sq ft
Furling genoa - Performance mast	83,5 m² / 898 Sq ft

I	21 m / 69'10"
J	6,90 m / 22'7"
P	20,30 m / 66'7"
E	7,20-7,50 m / 23'7"-24'7"
Air draft	25,20 m / 82'8"
CE category	A14 / B16 / C16 / D16
Architect Design	Philippe Briand / Andrew Winch / Jeanneau

CONSTRUCTION (1/4)

INFUSION **MONOLITHIC** MOULDED HULL AND INFUSION DECK




MOTEUR ENGINE YANMAR 150 HP

STANDARD: 150 HP

150 HP Yanmar 4LV150 CR KMH50

- **Electrical control lever**
- 40 mm shaft,
- **Folding 3 blades propeller as standard**
- 4 cylinders - 2.755 L / 168 cu. In
- Direct Injection, Common Rail System
- Rated Speed: 3500 rpm
- Aspiration: Turbocharged & Intercooled
- Alternator: 12 V – 130 Ah

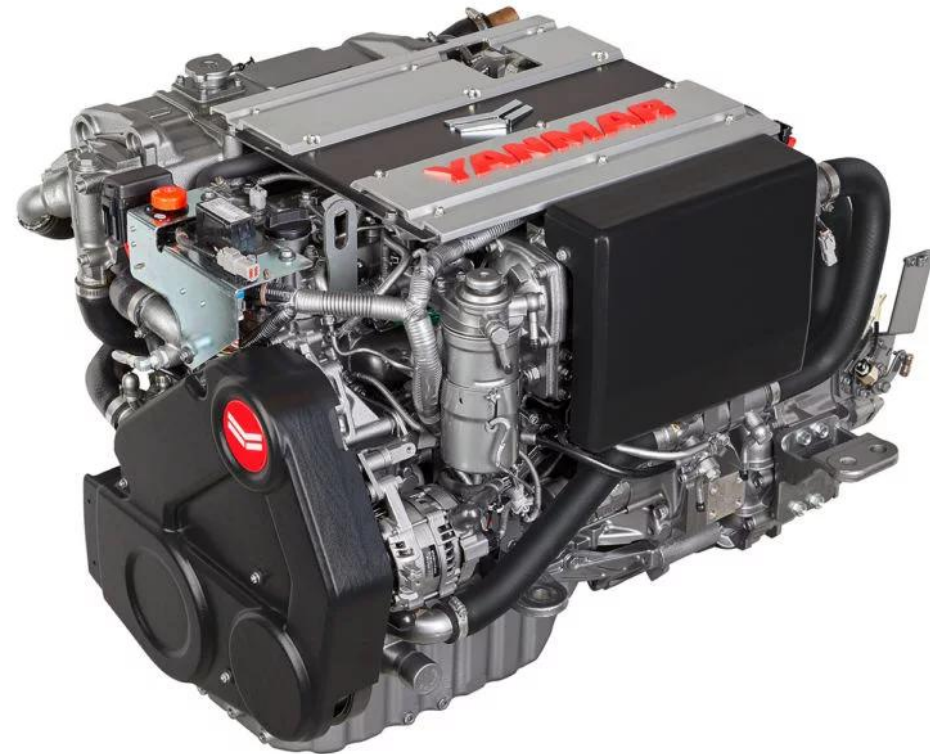


Motoring range

150 HP Yanmar 4JH110 CR ZF30M

3 blades folding propeller 23X13 RH40 FOF


rpm	speed knt	conso l/h	range NM
1200	4,46	1,85	1 533
1600	6,1	3,44	1 128
2000	7,4	6,33	744
2400	8,4	10,72	498
2800	9,16	17,11	340
3200	9,5	21,7	278

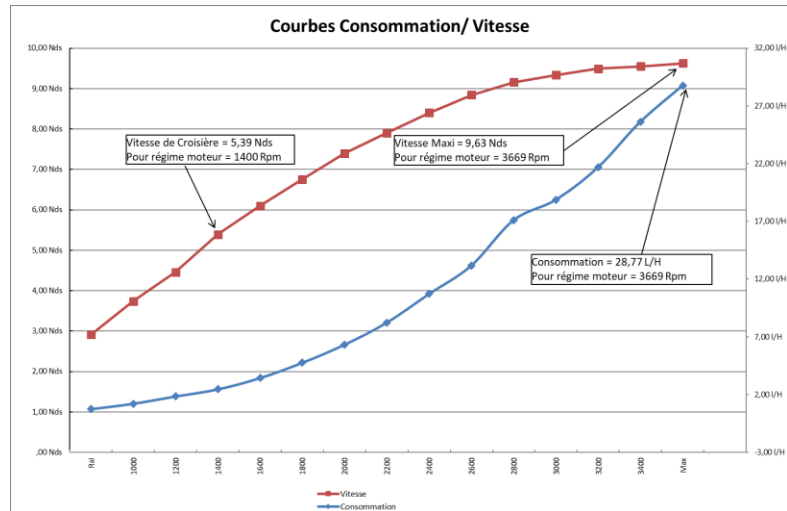

Fuel capacity is with extra tank = 636 liters

KEEL CHOICE and DRAFT

Shoal optional keel is 45 cm shorter and about 650 kg heavier

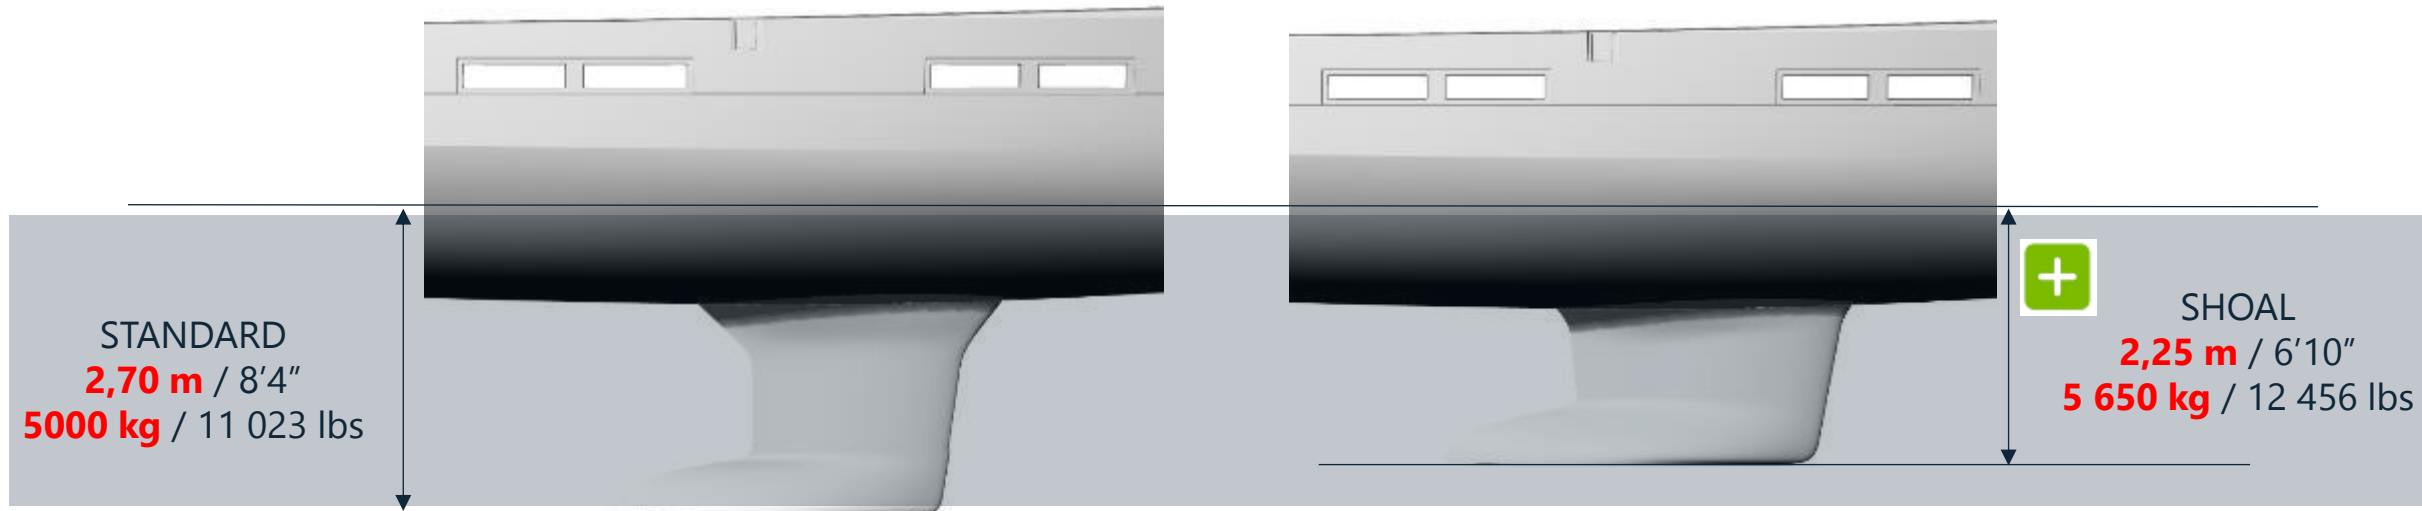


L-shaped cast iron keel

Version & interior layout choices

TWO CHOICES OF INTERIOR WOODWORK



**Bulkheads and
furniture:**
Alpi® Teak
Open-pore varnish

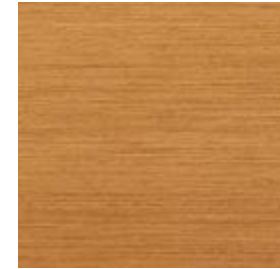

Floorboard:
Laminate
Rovere Aleve
Oak



**Bulkheads and
furniture:**
Alpi® White Oak
Open-pore varnish




Floorboard:
Laminate Dark
Oak




FRONT MASTER CABIN

Layout

1 FRONT OWNER'S CABIN / 2 AFT CABINS / 3 HEADS

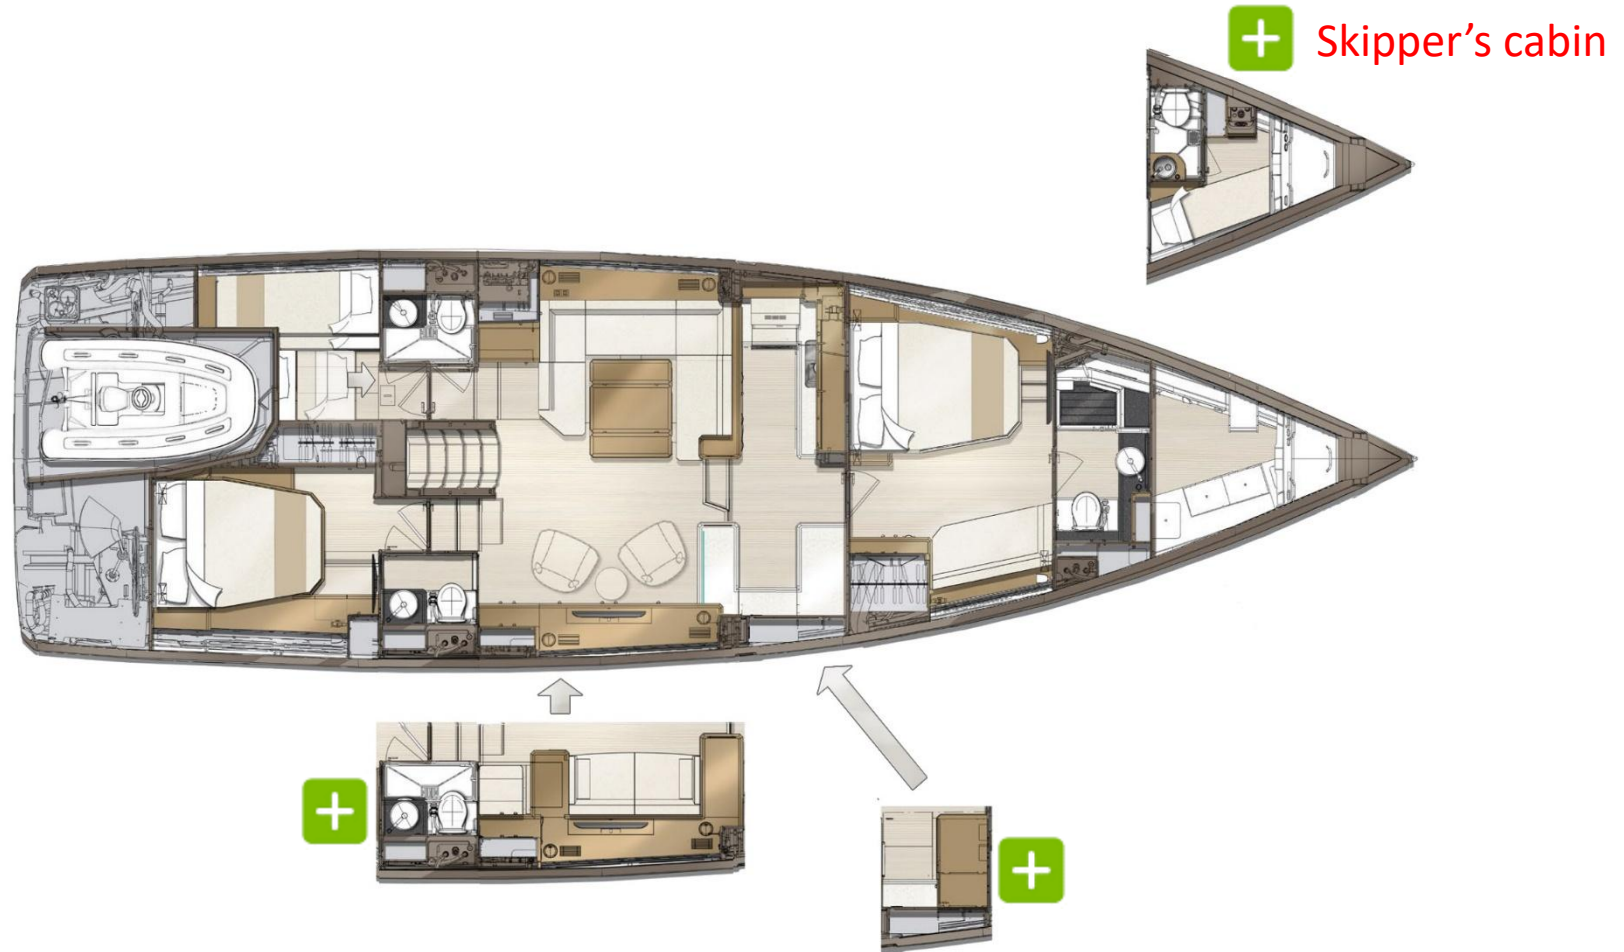


FRONT OWNER'S CABIN (1/3)

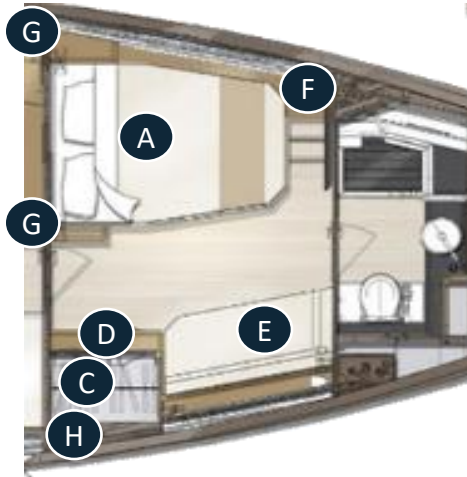


- A** Large double berth (1,60/1,23 x 2,05 m / 5'2"/4'0" x 6'8") (Thickness 120 mm / 0'4")
- B** Fixed hull ports with aviation shades
- C** Double hanging locker (L 92,9 x l 66,5 x h 94,5 cm / 3'0" x 2'2" x 3'1")
- D** Large drawers (2)
- E** Sofa (L 1,38 x l 0,66 m / 4'6" x 2'1")
- F** Discreet access to the bed
- G** LED reading and bedside lamps
- H** Optional electronic safe
- I** Large storage

FRONT OWNER'S CABIN (1/3)



Avec cette image, tu as le lit en position du milieu : pour avoir le plus petit tu enlèves les 200 mm ou tu les ajoutes pour avoir le plus grand.

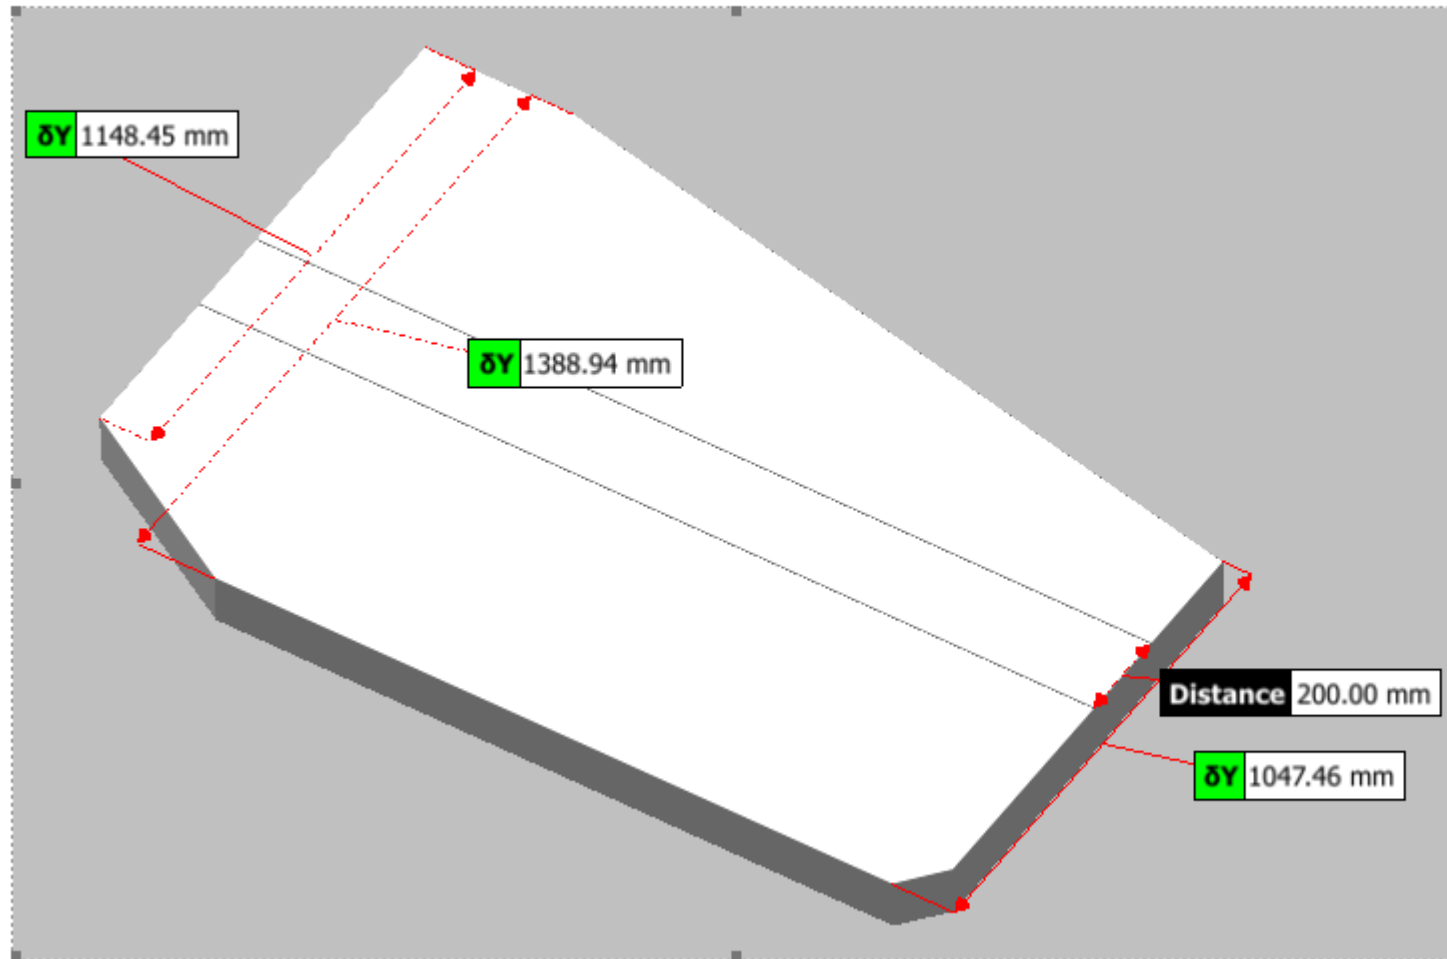


AFT VIP CABIN ON STARBOARD

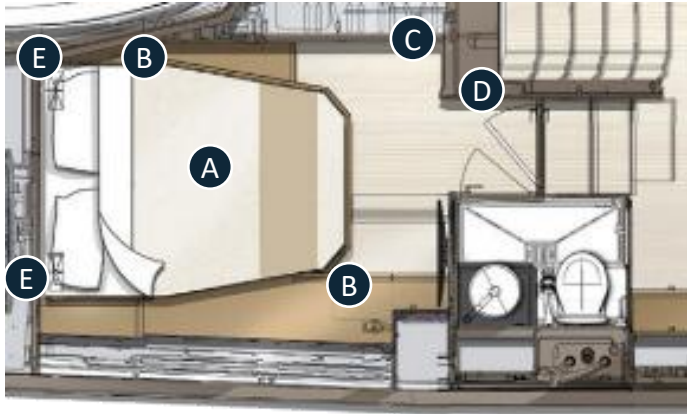

- A** Double berth (1,60/1,23 x 2,05 m / 5'2"/4'0" x 6'8"). (Thickness 100 mm / 0'3")
- B** Storage space
- C** Hanging locker
- D** Storage shelves
- E** LED reading and sockets
- F** Discreet access to the bed

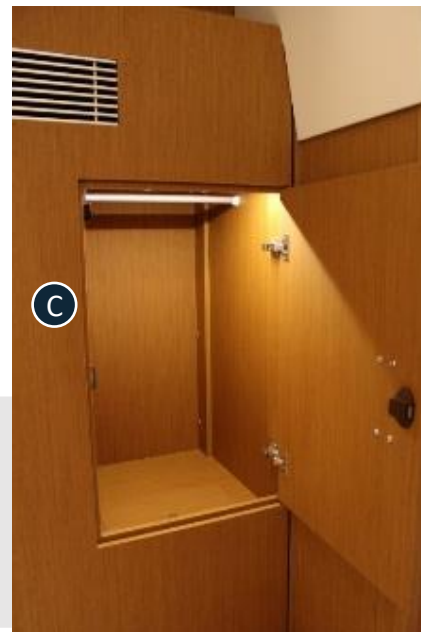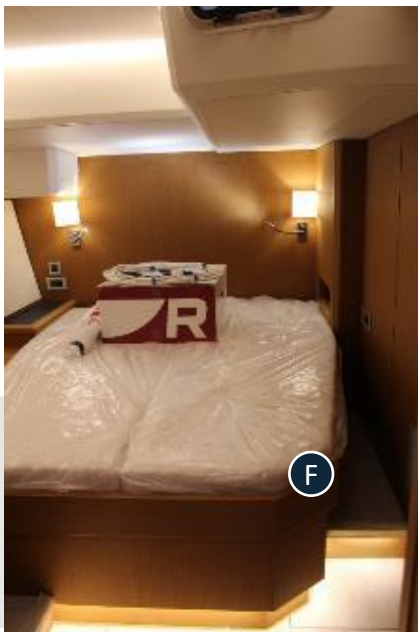

AFT GUEST CABIN ON PORT SIDE

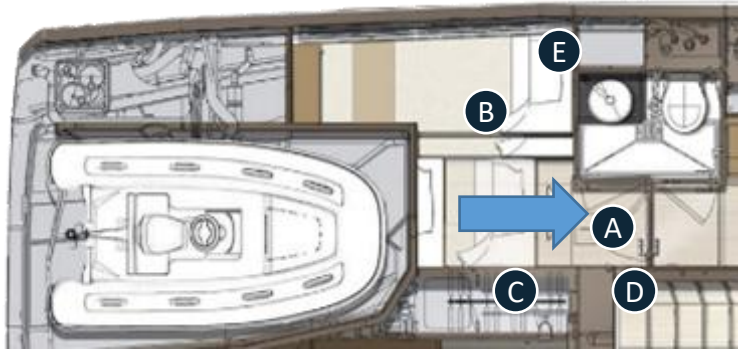

- A** Lower single berth, convertible into a double berth ((1,38/1,59 x 2,00 m / 4'6"/5'2" x 6'6"), with storage underneath. (Thickness 100 mm / 0'3")
- B** Upper single berth (0,75 x 2,00 m / 2'5" x 6'6")
- C** Hanging locker
- D** Storage shelves
- E** LED reading and sockets




AFT MASTER CABIN

Layout


1 AFT OWNER'S CABIN / 2 FRONT CABINS / 3 HEADS




AFT OWNER'S CABIN (1/3)

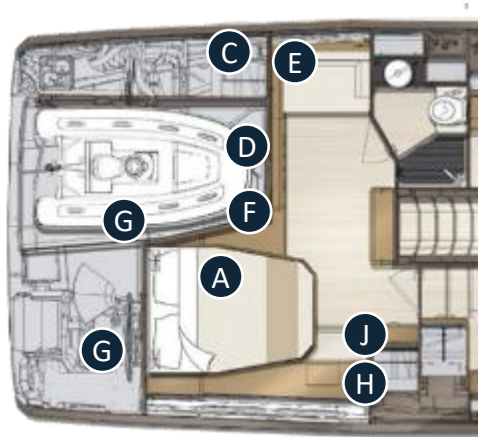


- A** Large double berth (1,60/1,23 x 2,05 m / 5'2"/4'0" x 6'8") (Thickness 120 mm / 0'4")
- B** Fixed hull ports with aviation shades
- C** Hanging locker (L 52,7 x l 38,12 x h 94,4 cm / 1'8" x 1'3" x 3'1")
- D** Storage cabinet with large drawers et shelves
- E** Sofa (L 0,92 x l 0,61 m) with under-sofa storage
- F** Lateral access to the bed
- G** LED reading and bedside lamps
- H** Safe
- I** Drawer under-bed storage
- J** Double hanging locker (L 57,3 x l 52,5 x h 104,9 cm / 1'10" x 1'8" x 3'5") with drawers

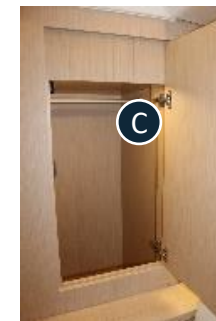

2 FRONT CABINS CONVERTIBLE INTO A MASTER CABIN - ONLY JY60 HAS THIS !

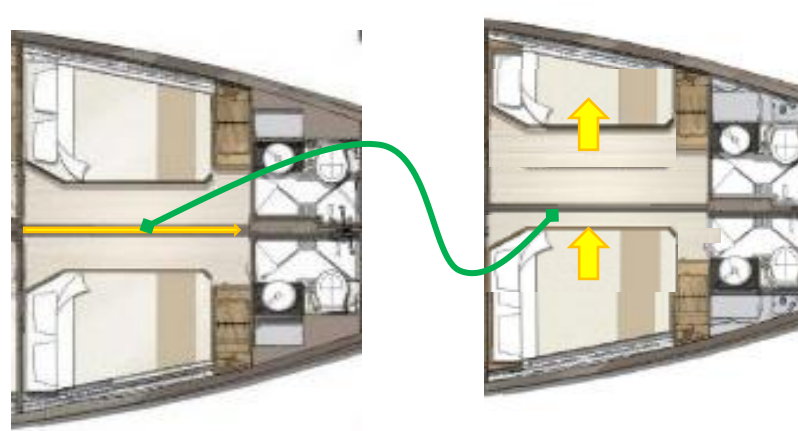


- A Bulkhead panels
- B Sliding bulkhead panels
- C Storage of bulkhead panels in the dedicated space between the 2 aft heads
- D once the bulkhead has been stowed away
- E Floorboard space, once the cabin is converted

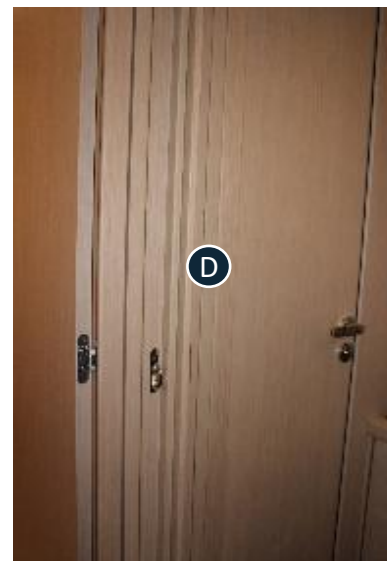

3 CHOICES ON THE FRONT PEAK : SAIL LOCKER | SKIPPER CABIN | BOW CABIN

STANDARD: SAIL LOCKER

Option Y3XHG

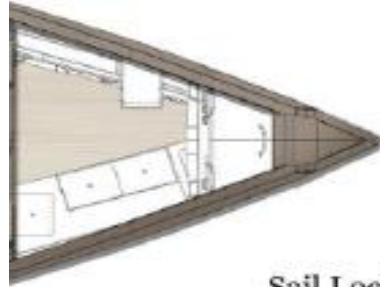

Sail Locker

Access through port fwd cabin


Access through lockable deck hatch
Access ladder
Storage
Access to bow thruster and technical areas
LED lighting

Standard



OPTION: SKIPPER CABIN

Option Y3XFG

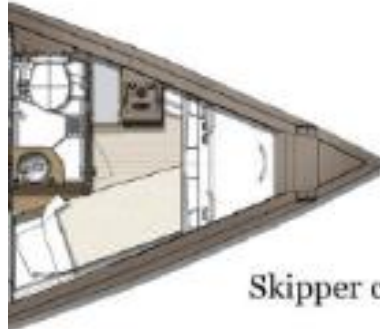

Skipper cabin

Access through lockable deck hatch
Access ladder
Storage
Simple berth
Separated toilet compartment with sink & shower

Compatible all versions



OPTION: BOW CABIN: CREW CABIN | KIDS CABIN

Option Y3XHG




Double Cabin Peak

Access through port fwd cabin







Double berth
2 hanging lockers
Storage

Compatible 2 front cabins version



+ SKIPPER CABIN

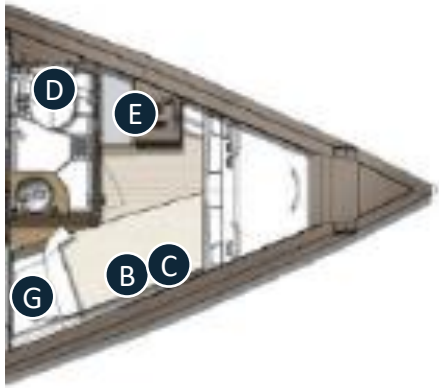

- A** Access deck hatches
- B** 2 bunk beds 0,65/0,56 x 1,90 m / 2'1"/1'10"x 6'2"
(Thickness 100 mm / 0'3")
- C** Tunnel bow thruster batteries
- D** Closed head with storage, shower, wc
- E** Access skipper cabin + holding tank + storage
(hanging locker and shelves)
- F** Storage
- G** Bow thruster battery switch

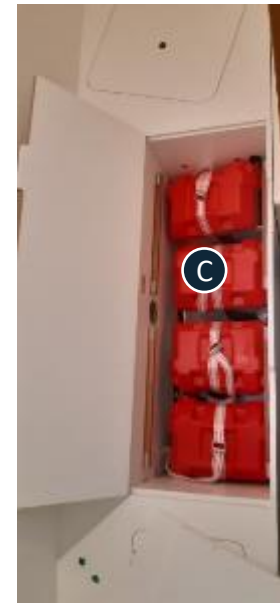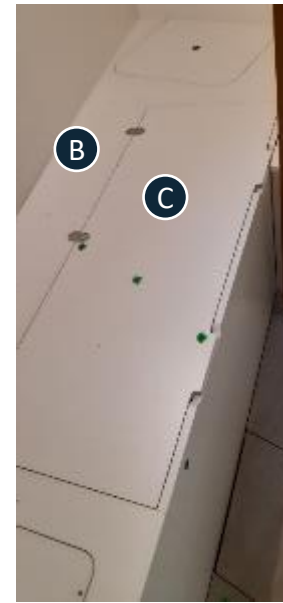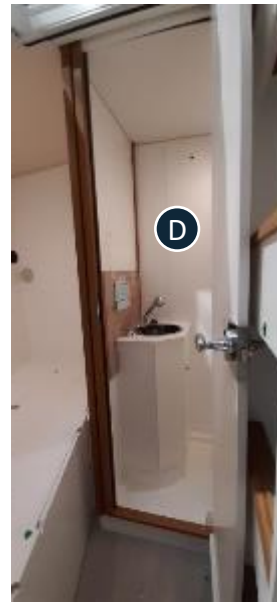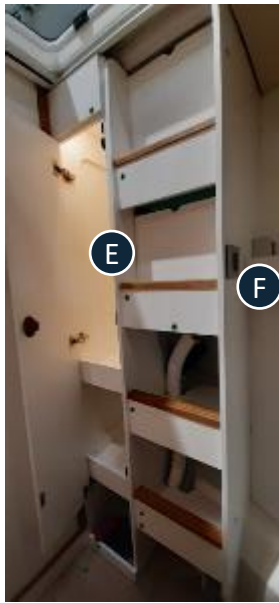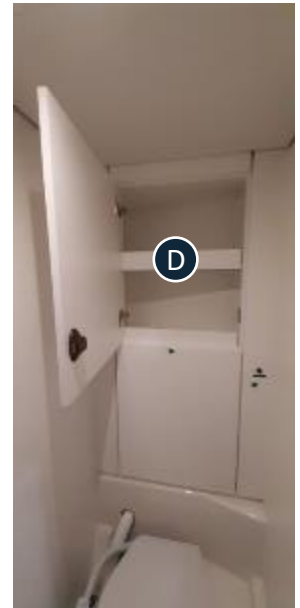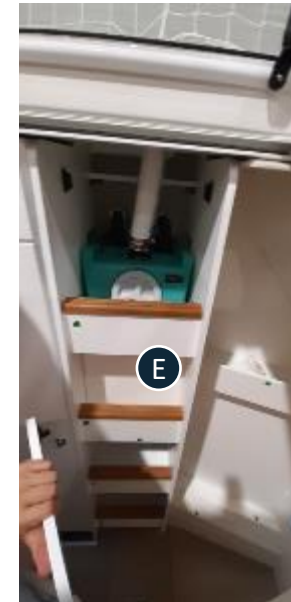

+ BOW CABIN: CREW CABIN | KIDS CABIN (1/2)

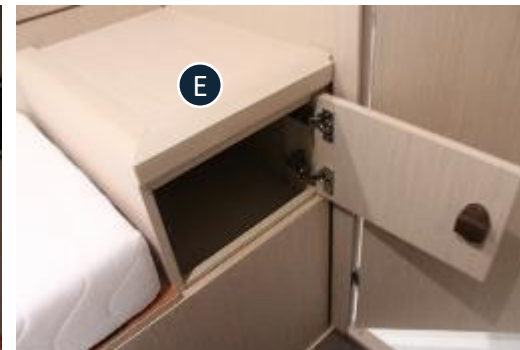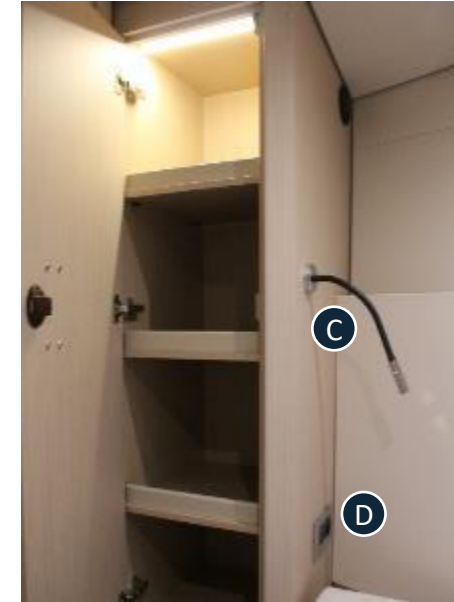

A Double berth with removable headboard section for easy passage (1,60/0,55 x 2,02 m / 5'2"/1'9" x 6'7"). (Thickness 121 mm / 0'4")

B Lateral storage shelf

C LED reading

D AC and USB plugs

E Storage shelf on port side

F Hanging locker and storage on starboard

G Opening deck hatch

UPHOLSTERY CHOICE



DK White leather (Option)



DK Chocolat leather (Option)


INTERIOR UPHOLSTERY CHOICE

UPHOLSTERY




STANDARD:
PVC Marlin Ivory

MRL-3201
12-0703 TPX



Dyna Pearl

Dynamo II 08 Pearl

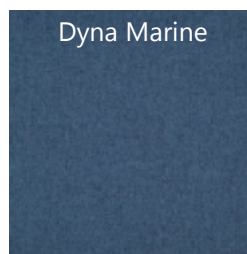

Dyna Marine

Dynamo I 32 Marine



Drom Cream

DROM 02



Drom Taupe


DROM 10

LEATHER



DK White

Duke DK01



DK Blue Night


Duke DK26



DK Chocolat

Duke DK02

DUKE = grained leather



DK Saphir

Lugano LG10



LG Mastic

Lugano LG02

LUGANO = nubuck leather

Hull and Deck

DECK PLAN

STANDARD : WITHOUT ARCH



OPTION : WITH ARCH + RIGGING HARDTOP



WITHOUT ARCH (STANDARD) vs WITH ARCH (2 / 2)



Option BEA50 POLYESTER ARCH FOR MAINSAIL SHEET

TEAK SIDE DECKS

+ OPTION : WE C04 TEAK SIDE DECKS



AMBIANCE LEDS IN COCKPIT AND AROUND THE SIDE DECKS ARE **STANDARD**



UNDERWATER PROJECTOR



OPTION : UNDERWATER PROJECTOR

AQUALUMA GEN 4 SERIES 6

4 projectors

Very compact with a 100° beam of light

Advantages

- Color: ultra blue
- Lumens: 4900/295
- 100° beam
- High resistance polycarbonate
- Anti-corrosion material

Reliability

- Advanced thermal management
- Reverse polarity protection
- Surge protection
- Waterproof to IP68

Option FNB05 UNDERWATER PROJECTOR (blue color) (x4)




Masts and Rigging


3 CHOICES OF MASTS

1. FURLING STANDARD MAST
 2. OPTIONNAL CLASSIC MAST
- both 25,1 m

3. PERFORMANCE CLASSIC MAST
- 26,7 m (+ 1,60 m)

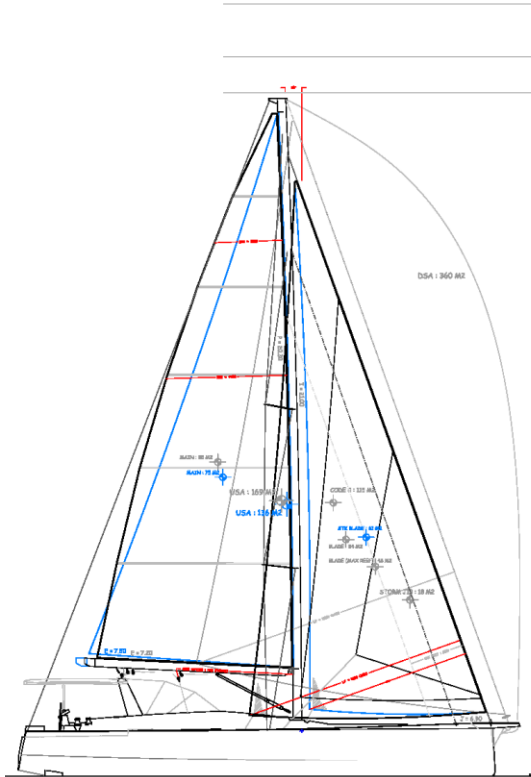


GV classique foc auto 141 m²
GV enr foc auto 131 m²

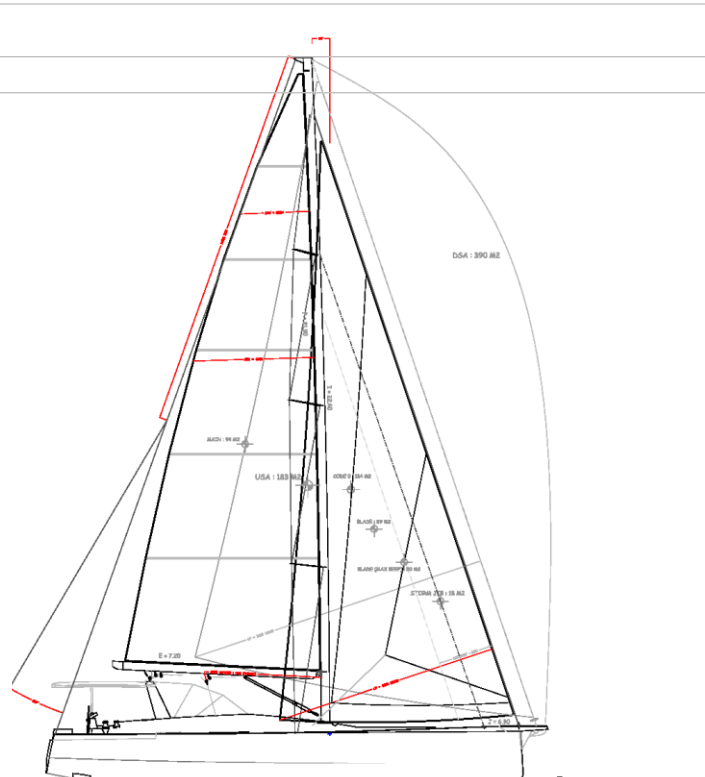

GV Génois Perf 177 m²
Surfaces au près

STANDARD RIGGING | FURLING MAST

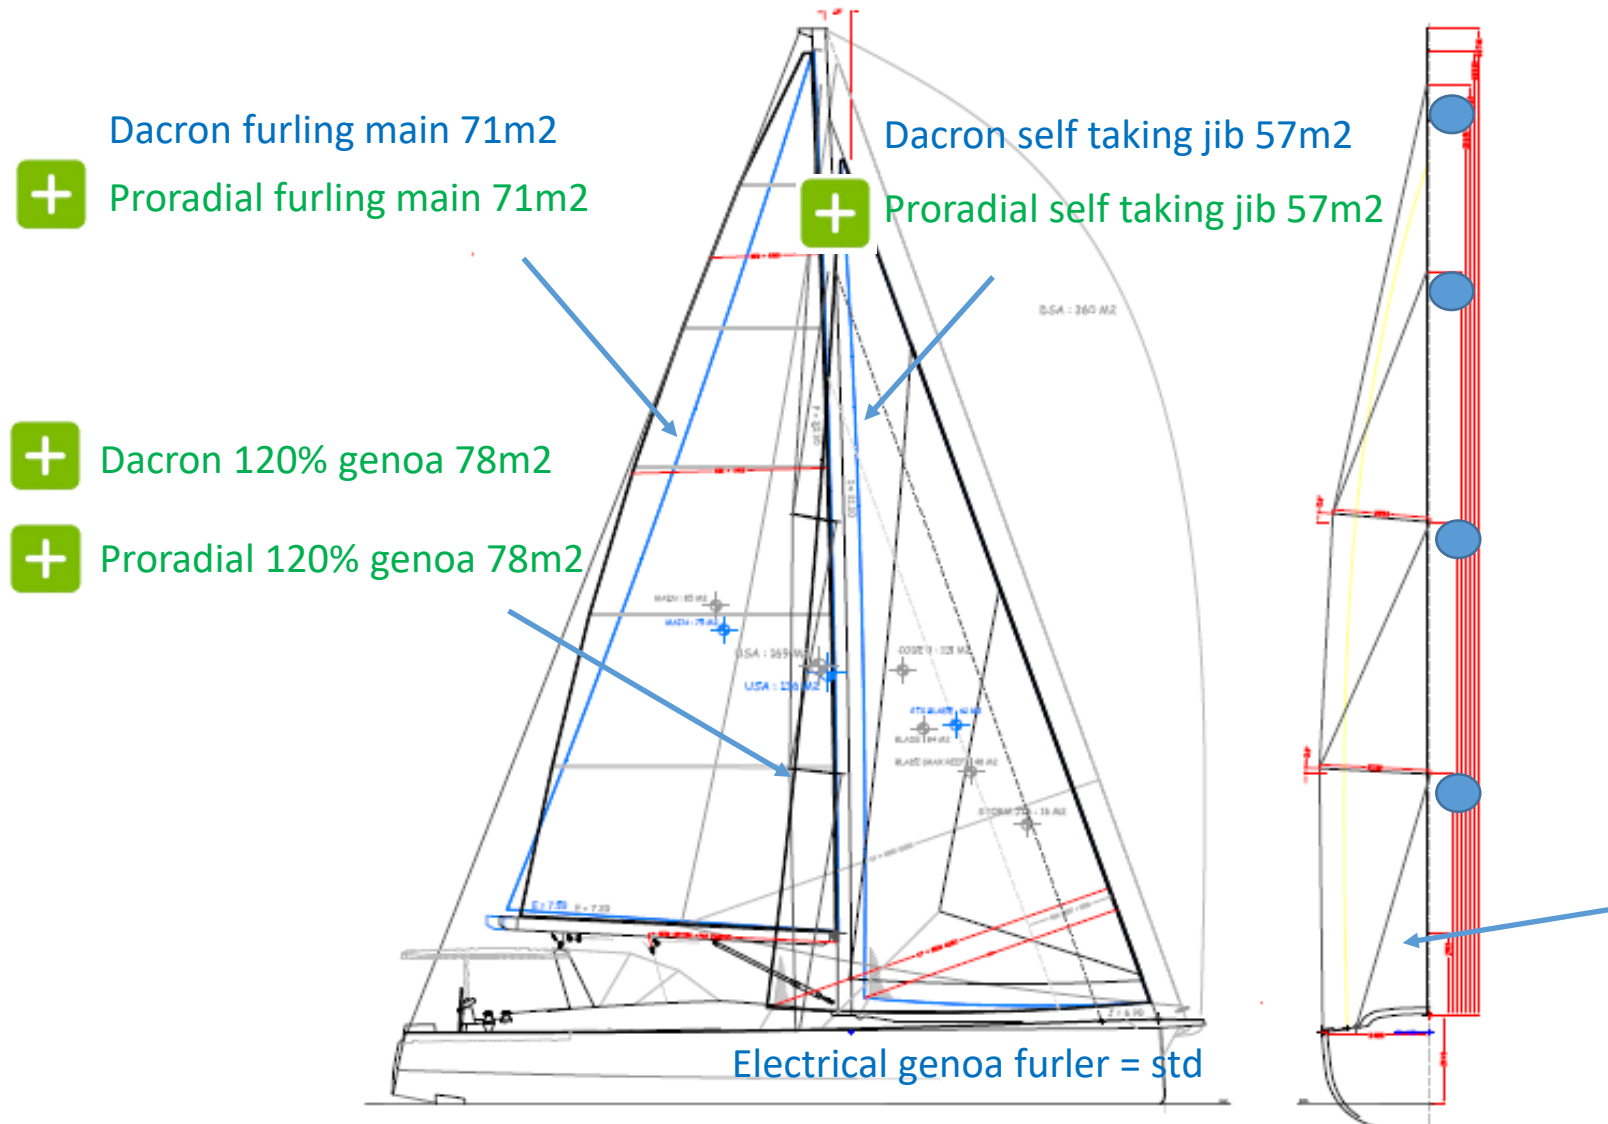

FURLING MAST: 22,7 m / 74'5"

- I: 21 m / 68'10"
- J: 6,9 m / 22'7"
- P: 20,30 m / 66'7"
- E: 7,20-7,50 m / 23'7"-24'7"

Air draft: 25,1 m / 82'4"

FURLING SAIL AREA: 128 m² / 1 369 Sq ft

Cathedral rigging:

- 2 levels of spreaders with 4 anchoring points on the mast
- Allows same stiffness as 3 spreader levels rigging overweight and the complexity of adjusting a three-stage rigging

Split rigging:

- The inner lower shrouds have been retracted to offer a easier and safer walk on the side deck, allowing larger overlap for genoa

ANODISED FURLING MAST + FURLING MAINSAIL AND SELF-TACKING JIB - STANDARD

SPARCRAFT® STANDARD MAST

- Deck stepped mast
- Manual rigid vang SPARCRAFT®|
- electric jib furler FACNOR® EF550
- Incidence mainsail & self tacking jib
- Halyards track adjuster on mast




RIGGING | CLASSIC MAST

Proradial Full batten mainsail 83,6m²

Proradial Self taking jib 57m²

+ Proradial 120% genoa 78m²

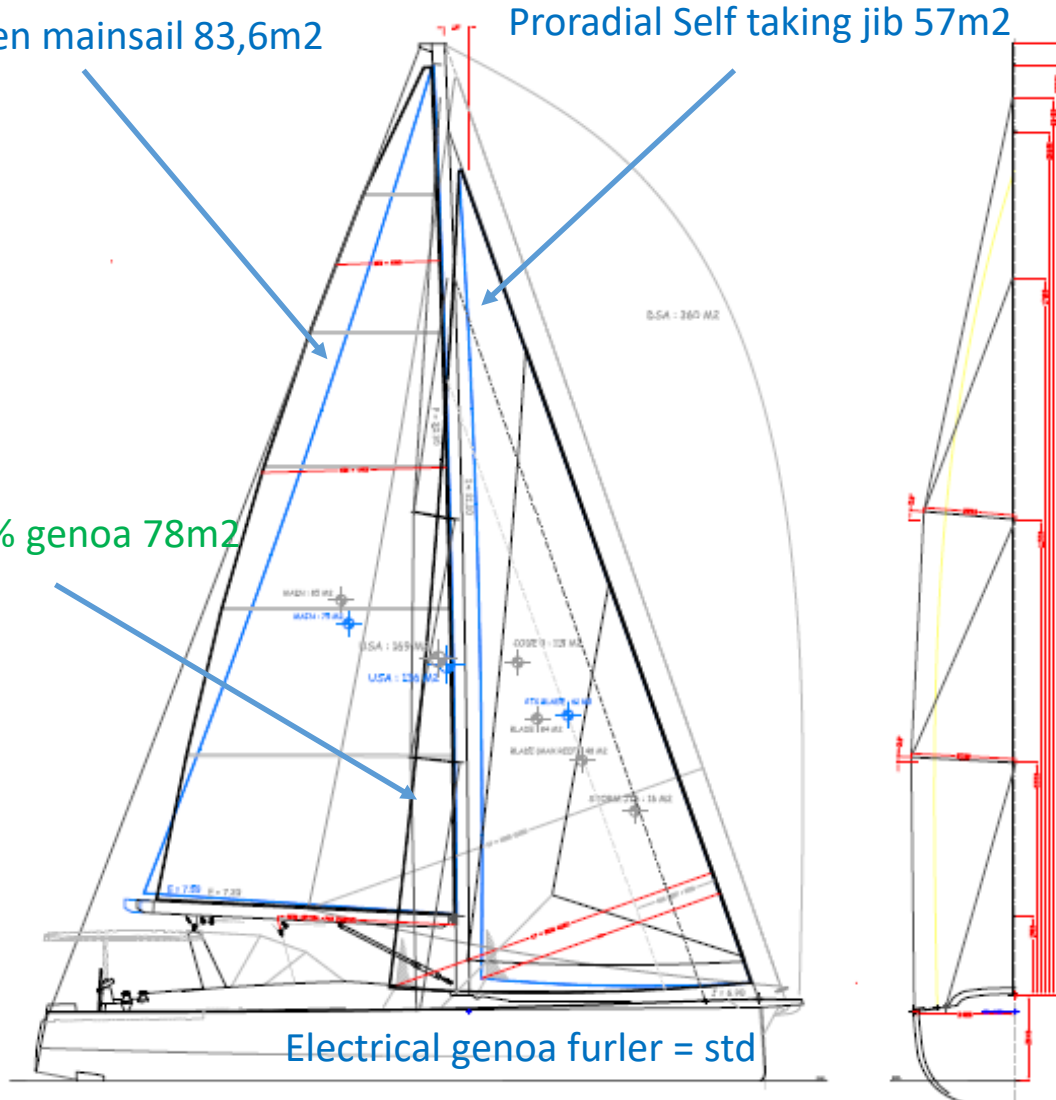

CLASSIC MAST: 22,7 m / 74'5"

- I: 21 m / 68'10"
- J: 6,9 m / 22'7"
- P: 20,30 m / 66'7"
- E: 7,20-7,50 m / 23'7"-24'7"

Air draft : 25,1 m / 82'4"

CLASSIC SAIL AREA: **140,6 m²** / 1 504 Sq ft

Cathedral rigging: 2 levels of spreaders

Split rigging: retracted inner lower shrouds

CLASSIC MAST + SELF TACKING JIB

+ OPTION : AMA08C ANODISED CLASSIC MAST + CANOE BOOM

ANODISED CLASSIC MAST + CANOE BOOM

- Deck stepped mast
- Aluminium Classic anodised mast SPARCRAFT®
- Aluminium anodised canoe boom SPARCRAFT®
- Colourless anodised pneumatic vang SPARCRAFT®
- Switch system HARKEN®



+ OPTION: AMA02CB WHITE PAINTED CLASSIC MAST + CANOE BOOM

WHITE PAINTED CLASSIC MAST + CANOE BOOM

- Deck stepped mast
- White painted mast SPARCRAFT®
- Anodised canoe boom SPARCRAFT®
- White lacquered pneumatic vang SPARCRAFT®
- Includes lazy jack and lazy bag colour Ardoise
- Electric jib furler FACNOR® EF550
- Switch system HARKEN®




RIGGING | PERFORMANCE MAST (+1,60 m / +4'11")

AVAILABLE IN ANODIZED ALUMINIUM OR WHITE PAINTED

Proradial Full batten mainsail 90,2 m²

Proradial 120% genoa 83,5 m²

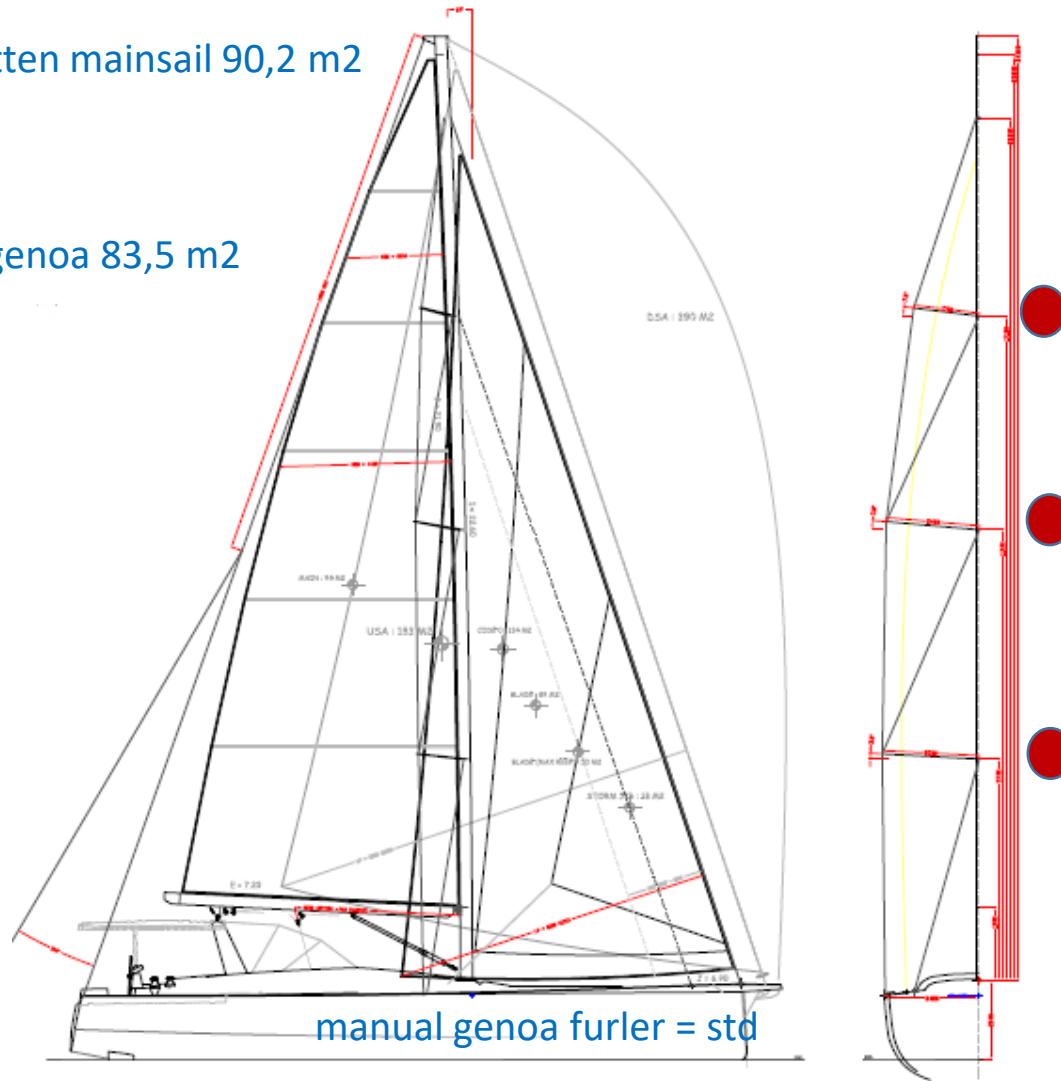

PERFORMANCE MAST: 24,20 m / 79'4"
(+1,5 m / + 4'11")

- I: 22,60 m / 71'10"
- J: 6,90 m / 22'7"
- P: 21,90 m / 74'1"
- E: 7,20 m / 23'7"

Air draft: 26,7 m / 87'7"

PERF SAIL AREA: 173,7 m² / 1 869 Sq ft


Rigging with 3 levels of spreaders



Split rigging: retracted inner lower shrouds

PERFORMANCE MAST (+1,60 m / + 4'11") WITH 120% GENOA (2/2)


+ WHITE PAINTED PERFORMANCE MAST + CANOE BOOM

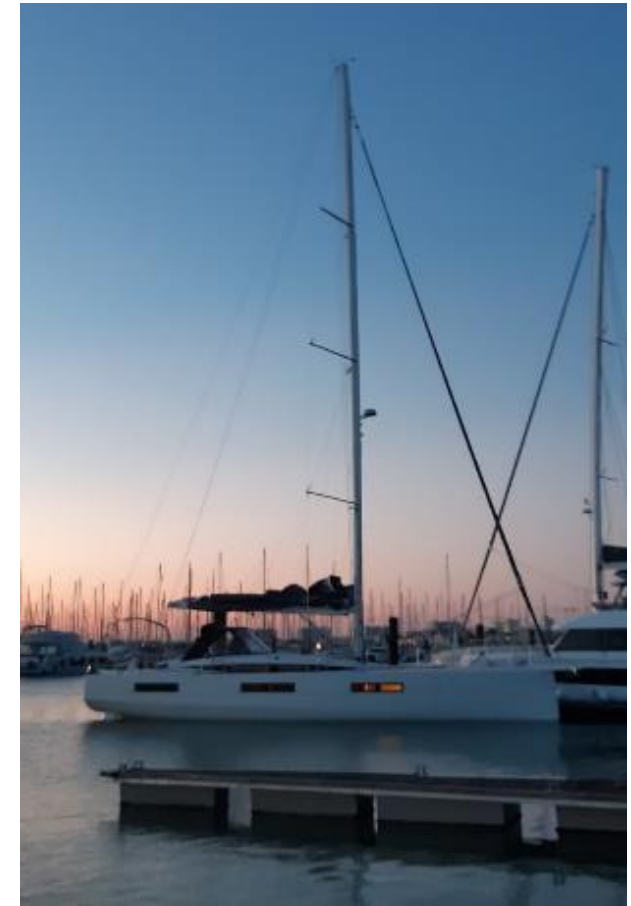

LAZY BAG

LAZY BAG

STANDARD: Ardoise color

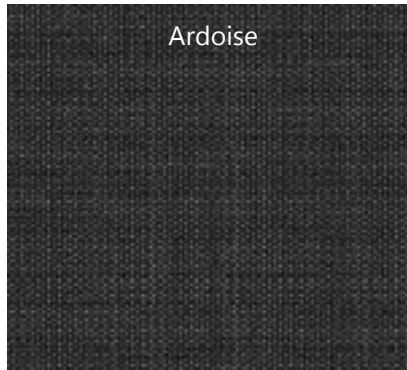

Sunbrella Plus Charcoal Piqué
SUNTT 5088 152

4 lazy-jacks attachment points
Closing system: back metal zip on the middle

+ LED LIGHTING IN SPREADERS

+ OPTION: LED LIGHTING IN SPREADERS

Options:
FNB11EA/OA for Furling or Classic
mast
FNB11PA for Performance mast,

x4 on Furling or Classic masts
x6 on Performance



SAIL HANDLING

SELF TACKING TRACK - STANDARD GENOA TRACKS - OPTION

STANDARD : SELF TACKING TRACK



AU R05 GENOA TRACKS FOR 120% GENOA FOR FURLING AND CLASSIC MAST
(mandatory with Perf and Carbon masts)



RIGGING AND DECK FITTING FOR ASYMETRICAL SPINNAKER AND CODE 0



OPTION: AC B03 RIGGING FOR ASYMETRICAL SPINNAKER

- 1 * HALYARD D12 L67 ML
- 1 * **ASYMETRICAL SPINAKER TACKING LINE D12 L20 ML**
- 2 * SPINAKER SHEET D14 L38 ML
- 3 * HARKEN BLOCK H3007 BM100
- 1 * HARKEN BLOCK H E80
- 1 * SANDOW D 5 NM BLC



OPTION: AC E06 RIGGING FOR CODE 0

- 1 * HALYARD D12 L88 ML
- 1 * WICHARD BLOCK D80
- 2 * SPINAKER SHEET D14 L38 ML
- 2 * HARKEN BLOCK H3007 BM100
- 1 * HARKEN BLOCK H E80
- 1 * SANDOW D 5 NM BLC



OPTION: AU A00 FITTING FOR ASYMETRICAL SPINNAKER, CODE 0 OR CODE 3

2 * JAMMERS R18



HYDRAULIC BACKSTAY AND BOOM (1/2)



ACF21C BACKSTAY + HYDRAULIC VANG FOR CLASSIC MAST (black)



ADD21C HYDRAULIC BACKSTAY FOR CLASSIC MAST (black)



Hydraulic backstay



GENOA FURLING SYSTEM – FURLING AND CLASSIC MASTS (1/3)

STANDARD : FACNOR ELECTRICAL FURLING SYSTEM EF550

- Effortless Furling, perfect for short-handed crews
- Wired or radio remote control
- Waterproof drive unit
- No specific maintenance required
- Optimized power (max 800W, speed 30t/min)
- Low energy consumption
- Reduced noise level



http://www.facnor.com/uk/products/headsail_furlers/motorized_furlers/electric_furlers_ec_and_e/default.asp

GENOA FURLING SYSTEM – PERFORMANCE MAST

STANDARD with PERFORMANCE MAST: FACNOR MANUAL FURLING SYSTEM LS 290

Widely proven on all the seas of the globe, the LS range benefits from solid tubes and connections, sealed bearing boxes, which ensure winding reliability.

- Maintenance-free (bearing box)
- Extensive and proven range
- Robust profiles and connections
- Easy assembly (thanks to the telescopic tube)
- straight line guide



http://www.facnor.com/uk/products/headsail_furlers/motorized_furlers/electric_furlers_ec_and_e/default.asp

2ND FORE STAY



ADD05 2ND FLYING FORESTAY WITH TENSIONER AND STORAGE LINE

COMPATIBLE WITH FURLING or CLASSIC MAST


With Wichard pelican turnbuckle



ADD11 2ND FORESTAY **WITH MANUAL** FURLER / FURLING or CLASSIC MAST



ADD11P 2ND FORESTAY **WITH MANUAL FURLER** / PERFORMANCE MAST

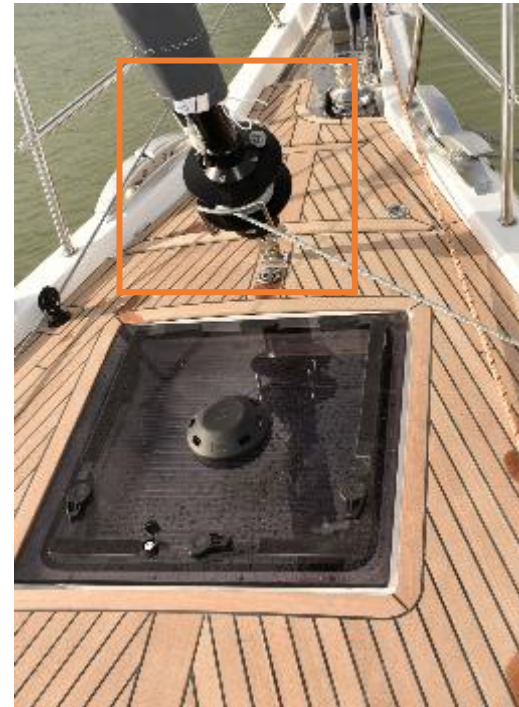

WINCHES

STANDARD: 2 x 46-2 STA rewind electric winches HARKEN

STANDARD : 2 x 70.2 STA manual genoas winches HARKEN



With control at helm station

HARKEN
INNOVATIVE SAILING SOLUTIONS

The Radial Grip on the headstock specifically machined for each winch size and material replaces the knurled abrasive surface while increasing holding power and reducing rope wear.
The self-tailing mechanism allows a crew member to hoist or trim the sails on his own quickly and easily.



Option AUW14 2 ADDITIONAL 70-2 STAEH ELECTRIC GENOA WINCHES



Radial electric winches allow you to trim sails of any size effortlessly at the touch of a button.

Needle bearings and bearings made of high-strength composite material limit friction under load. Gears and load-bearing axles in corrosion-resistant 17-4 PH stainless steel for extra strength.

Attachment to the central drive shaft and operation of the winch gears and their two mechanical speeds.

- 1st speed: quick engagement
- 2nd speed: fine adjustment of the sheets under load

Efficient design allowing a reduction in motor dimensions.

SAILS

OPTIONAL SAILS FOR FURLING MAST



Option AVH31P FURLING MAINSAIL IN PRORADIAL (instead of Dacron)

- Triradial cut
- Proradial® Grey
- Grey UV protection
- Surface 71 m² / 764 Sq ft



Option AVH02P SELF-TACKING PRORADIAL JIB (replace Dacron STD jib)

- Triradial cut
- Proradial® Grey
- Anti-UV protection to match the fabric
- Surface 57 m² / 613 Sq ft



Option AVH13C GENOA 120% DACRON (replace the STD Dacron self taking jib)

- Horizontal cut / cross cut
- Dacron®
- Anti-UV protection to match the fabric
- Surface 78 m² / 839 Sq ft

Genoa tracks option mandatory



Option AVH18C GENOA 120% PRORADIAL GENOA / FURLING MAST (replace the self taking Dacron jib)

- Triradial cut
- Proradial® Grey
- Anti-UV protection to match the fabric
- Surface 78 m² / 839 Sq ft

Genoa track option mandatory



Option AVG07 SELF-TACKING CUTTER SAIL DACRON FOR FURLING MAST

STANDARD SAIL AREA: 128 m² / 1 377 Sq ft (proto surface) =

Furling mainsail Dacron® (GV enrouleur)

- Parallel panels
- Dacron®
- White anti-UV protection
- No batten
- Surface 71 m² / 764 Sq ft

Self-tacking jib Dacron® (Foc autovireur Dacron®)

- Parallel panels
- Dacron®
- White anti-UV protection
- Surface 57 m² / 613 Sq ft

OPTIONAL SAILS FOR CLASSIC MAST

A

Classic mast mainsail Proradial® (GV mâât classique Proradial®)

- Triradial cut
- Proradial® Grey
- Full batten with 3 reefs
- Surface 83,6 m² / 900 Sq ft

Included with Classic mast

Self-tacking jib Proradial® (Foc autovireur Proradial®)

- Triradial cut
- Proradial® Grey
- Anti-UV protection to match the fabric
- Surface 57 m² / 613 Sq ft

Included with Classic mast

B



Option AVH18C GENOA 120% PRORADIAL GENOA / CLASSIC MAST (replace the self taking Proradial jib)

- Triradial cut
- Proradial® Grey
- Anti-UV protection to match the fabric
- Surface 78 m² / 839 Sq ft

Genoa track option mandatory



OPTIONAL SAILS FOR FURLING AND CLASSIC MASTS (2/2)

- A** **+** **Option AVG07C CUTTER SAIL, SELF TAKING PRORADIAL FOR 2ND FORESTAY / FURLING, CLASSIC and PERF MASTS**
- On furler
 - Proradial® Grey
 - Surface 35 m² / 377 Sq ft (proto surface)
- B** **+** **Option AVH21 CODE 0 ON FURLER / FURLING and CLASSIC MASTS**
- On flat drum furler
 - Translucent grey Mylar/Aramid X-Grid® laminated fabric
 - Surface 122 m² / 1 313 Sq ft
- C** **+** **Option AVH24 CODE 3 ON FURLER / FURLING and CLASSIC MASTS**
- Triradial cut
 - On flat drum furler
 - Stormlite ® Cool Grey fabric
 - Surface 160 m² / 1 722 Sq ft



SAILS FOR PERFORMANCE MAST (tall aluminium mast) (1/3)

Performance mast mainsail Proradial

- Triradial cut
- Pro Radial® Grey
- Full batten with 3 reefs
- Surface 90,2 m² / 971 Sq ft

Included with Performance mast

Performance mast Furling genoa Proradial® (manual rewinder) (Génois enrouleur manuel)

- Triradial cut
- Proradial® Grey
- Low overlap 120%
- Anti-UV protection to match the fabric
- Surface area 83,5 m² / 898 Sq ft

Included with Performance mast



Option AVG07C CUTTER SAIL, SELF TAKING DACRON FOR 2ND FORESTAY / FURLING, CLASSIC and PERF MASTS

- Triradial cut
- On furler
- Proradial® Grey
- Surface 35 m² / 377 Sq ft (proto surface)



• Option AVH21MP CODE 0 ON FURLER / PERFORMANCE MAST

- On flat drum furler
- Translucent grey Mylar/Aramid X-Grid® laminated fabric
- Surface 134 m² / 1 442 Sq ft
- Light genoa with a flat shape and a fairly light grammage
- Ideal sail for upwind sailing in light weather (less than 10 kn between 30 and 60° from the apparent wind)



Option AVH24P CODE 3 ON FURLER / PERFORMANCE MAST

- Triradial cut
- On flat drum furler
- Stormlite ® Cool Grey fabric
- Surface 174 m² / 1 872 Sq ft



SAILS - CODE 0 :122 m² / 1 313 Sq ft



- 1 - Protective taffeta
- 2 - Polyester film
- 3 - X-Grid® fibers
- 4 - Polyester scrim



SAILS - CODE 3 :160 m² / 1 722 Sq ft

Code 3 is a spinnaker that can be rolled on a furler and used between 60° and 140° of wind.

Gennaker a little more hollow than Code 0, for Reaching in medium wind.
Medium Grammage





HIGH DENSITY IMPREGNATED SPINNAKER WEAVE 100% POLYESTER
Stormlite a fabric that keeps its shape better than nylon spinnaker fabrics
(more resistant and stable).

Cockpit

COCKPIT - AFT ACCESS | FOLD DOWN SWIM PLATFORM



- A Large fold down swim platform | access to the garage
- B Tender garage, liferaft, electric inflator and electric system in option
- C Access to the platform via a wide and safe companionway
- D Swim ladder

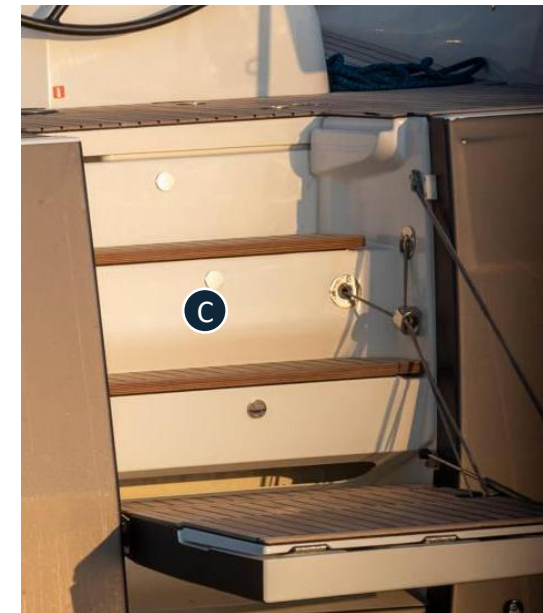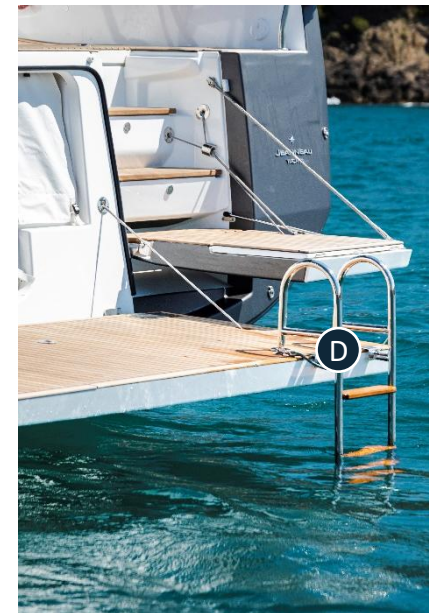

3 CHOICES OF STEERING WHEELS

STANDARD : steering wheels

Diameter 1,10 m / 3'7"



Option D0A08N COMPOSITE STEERING WHEELS (black color) (x2)

Diameter 1,10 m / 3'7"



Option: D0A05 CARBON STEERING WHEELS (black color) (x2)

Diameter 1,10 m / 3'7"





TWO KINDS OF COCKPIT SHOWER

STANDARD: cockpit shower



Option EEA05 LUXURY COCKPIT SHOWER (on a pole)

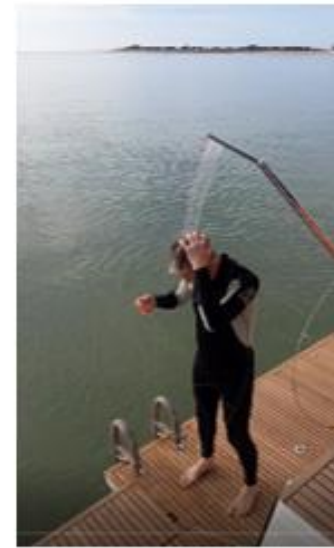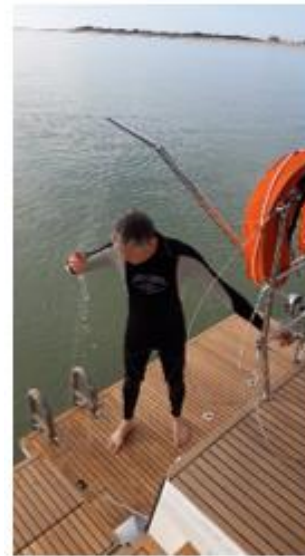

Removable hand shower; mechanical mixer



Option BEM20 AFT COCKPIT BENCH + GALLEY (Fridge with drawer, Plancha, Sink)



D

BENCH WITHOUT GALLEY EQUIPMENT IS ALSO AVAILABLE



A

C

B

A 30L Dometic fridge

B Sink and foldable tap

C **Electrical** 1300W plancha grill


D Sun mattress and backrest on aft railing

TWO STANDRAD FIXED COCKPIT TABLES / ELECTRICAL AS AN OPTION



A Protected by the optional sprayhood ; 10 people can seat around two large cockpit tables

B standard fixed pedestals on port side and starboard; both can be electric as an option

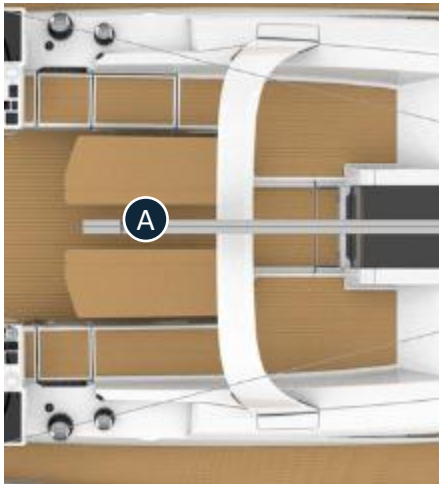

PORTSIDE

OPTION: BET20B ELECTRICAL PIEDESTAL ON COCKPIT TABLE
(instead of fixed pedestal)



STARBOARD

OPTION: BET20t ELECTRICAL PIEDESTAL ON COCKPIT TABLE
(instead of fixed pedestal)



OPTION: Electric cockpit table pedestal

External Canvas


EXTERIOR UPHOLSTERY AND CANVAS (1/2)



EXTERIOR UPHOLSTERY




Crevin BORA BORA 59

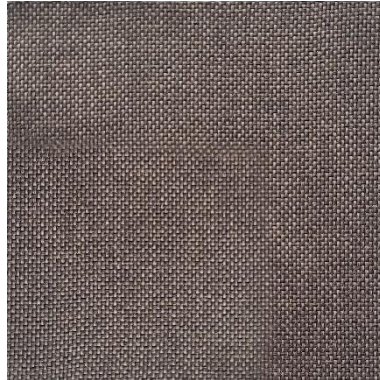

Carbon Beige



CANVAS

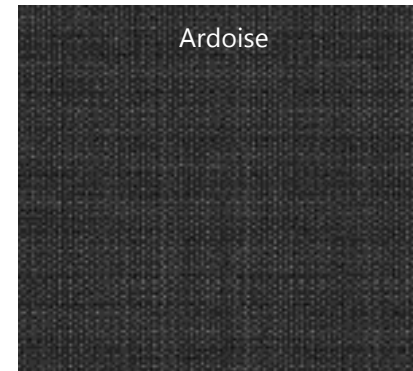

Ardoise

Sunbrella Plus Charcoal Piqué
SUNTT 5088 152

RIGID HARD TOP

- + Option BEIR162 RIGID HARDTOP BIMINI WITH ELECTRICAL OPENING
extra Arch option mandatory



SUN AWNING ON FOREDECK WITH CARBON REMOVABLE POLES



Option BEDA062 SUN AWNING ON FOREDECK WITH CARBON REMOVABLE POLES



Deck-mounted fastening system for sun awning



Cover

- Dimension: L= 4050mm/ l= 2220mm / h= Bi
- Area to be covered: Deck in front of the mast

Technology and use in navigation

- Visibility: 360°
- 2 protective canvases
- Fixing: 2 stainless steel bases for 2 Carbon posts Ø 38 mm
- Strap tension

Modularity of the product :


- Handling: the product can be dismantled with a storage bag,

Design/Aesthetics/Finishing:

- Black Sunworker canvas (M391 Black)

Ardoise



The SUNWORKER sun protection fabric regulates light and heat and optimises energy consumption in a sustainable way.



SPRAYHOOD IS SHORTER WITHOUT THE ARCH



Option BECA21Y SPRAYHOOD FOR VERSION WITHOUT ARCH - Ardoise

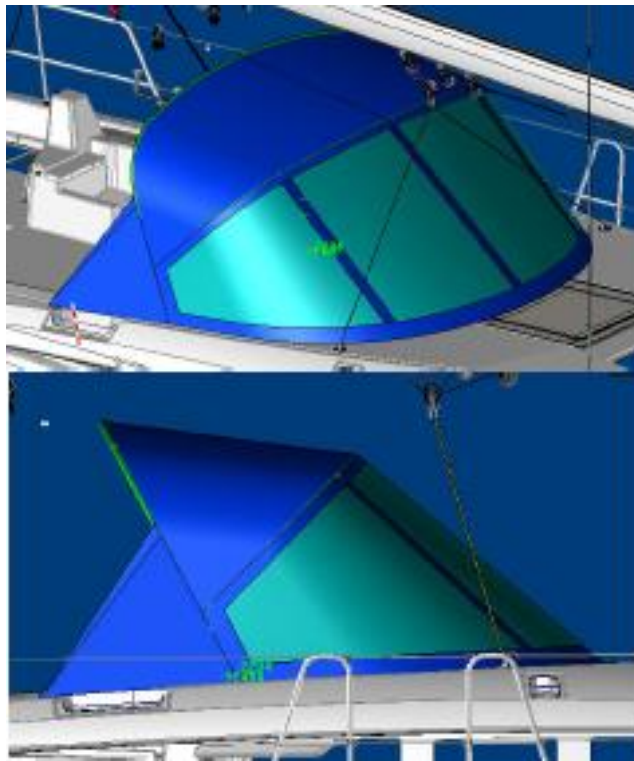

Option BECA21Y SPRAYHOOD FOR ARCH VERSION - Ardoise



SPRAYHOOD FOR STANDARD VERSION

STRATAGLASS offer press-polished clear vinyl enclosure products. The combination of the unique manufacturing process and innovative coatings results in the highest quality clear enclosure vinyl products.

Its qualities are recognized in particular in terms of durability.

The manufacturing process and the specific formulation of Strataglass give it performances that make the difference with other transparent sheets: scratch-resistant surface coating, transparency and exceptional vision, resistance to dirt, longevity.

SPRAYHOOD FOR ARCH VERSION

LEXAN polycarbonate is an amorphous technical thermoplastic characterized by mechanical, optical, electrical and thermal properties.

The LEXAN range offers great design versatility thanks to its wide range of viscosities and options such as: environmentally friendly flame retardancy, scratch resistance, toughness, heat resistance, weather resistance, weather resistance, biocompatibility, optical quality and FDA compliance with strict USP requirements.

- Perfect transparency
- Optical quality
- Dimensional stability, rigidity
- UV-stabilised
- Good shock resistance
- High fluidity
- Good temperature resistance
- Good electrical properties



BIMINI ABOVE HELM STATIONS



Option BEI0171 BIMINI COCKPIT - Ardoise or Papyrus



- Dimension: L= 4820 mm (15'9") / l= 1670 mm (5'5") / h= 2090 mm (6'10")
- Visibility: 360°
- Easy access to the side deck and the aft platform
- 3 stainless steel tubes Ø 30 mm with welded end caps
- Fixing: 2 feet with turnbuckles (for tensioning the canvas)
- LED light on front arch
- Zips to take up the back closure and the connecting fabric

Modularity of the product:

- Handling: folds up on the back, stowed on the 2 feet
- Can be stored around backstays
- Banana bag provided for storage

Design:

- Sunbrella+ Acrylic Canvas
- Window with foldable curtains above both helm station posts to allow visibility on the main.



Ardoise

Available with or without the arch

CONNECTOR – WITHOUT ARCH (1/2)



Option BEI20xx CONNECTING CANVAS BETWEEN BIMINI/SPRAYHOOD WITHOUT ARCH - Ardoise or Papyrus



Dimension: L= 4050 mm (13'3") / l= 2220 mm (7'3") / h= Bi

- Visibility: 360°
- Access via the sideck and access to the beach back
- Fastening: by zip on the bimini and headrope on the hoop
- Has side zips to take up the rear closure
- Tension through the bimini's turnbuckles
- Fixing kit with lacquered rails on polyester arch


Modularity of the product :

- Handling: can be rolled back on the bimini or dismantled

Design/Aesthetics/Finish:

- Sunbrella+ Acrylic Canvas

Ardoise



CONNECTOR – WITH ARCH (2/2)

+ CONNECTOR FOR ARCH VERSION

Option BEI2Axx CONNECTING CANVAS BETWEEN BIMINI/SPRAYHOOD WITH ARCH - Ardoise or Papyrus

Dimension:L= 4050 mm (13'3") / l= 1520 mm (4'11") / h= Bi

Ardoise



FULL ENCLOSURE CANVAS




+ OPTION: FULL ENCLOSURE CANVAS

Option:

BEFCA 1Y/71 CLOSING COCKPIT CANVAS / BIMINI / ARCH / WITH BENCH SEAT - Ardoise or Papyrus
BEFC1 1Y/71 CLOSING COCKPIT CANVAS / BIMINI / WITH BENCH SEAT - Ardoise or Papyrus
BEFC9 1Y/71 CLOSING COCKPIT CANVAS / HARD TOP / WITH BENCH SEAT - Ardoise or Papyrus

BEFOA 1Y/71 CLOSING COCKPIT CANVAS / BIMINI / ARCH / WITHOUT BENCH SEAT - Ardoise or Papyrus
BEF01 1Y/71 CLOSING COCKPIT CANVAS / BIMINI / WITHOUT BENCH SEAT - Ardoise or Papyrus
BEF09 1Y/71 CLOSING COCKPIT CANVAS / HARD TOP / WITHOUT BENCH SEAT - Ardoise or Papyrus

Ardoise

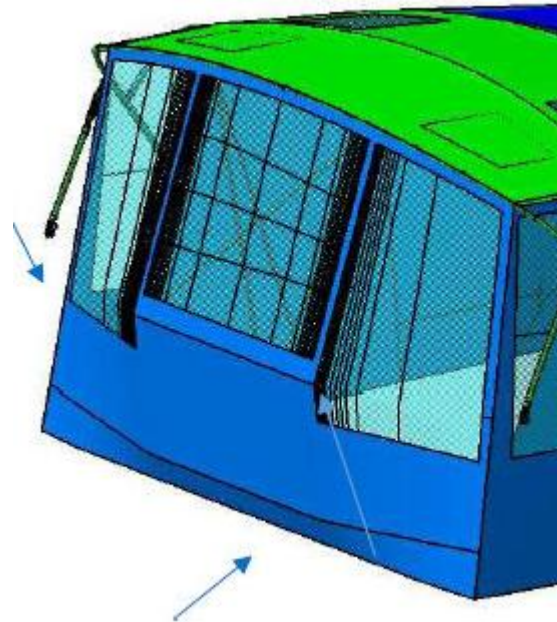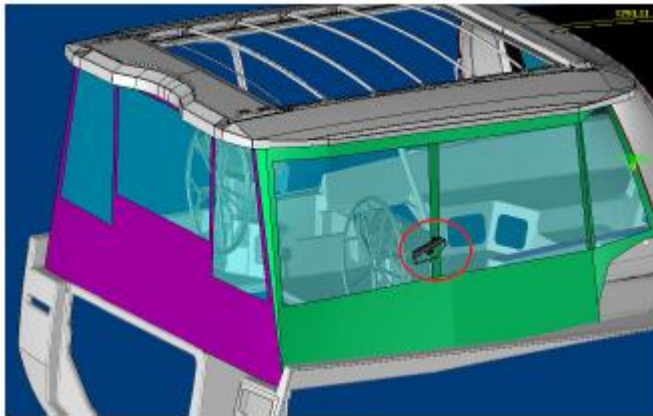

COVERS



BEH1471 COVERS FOR HELM STATIONS - Ardoise

- Sunbrella+ Acrylic Canvas
- Area to be covered: the helm station and the console
- Access to the handrail when the cover is in place



Ardoise




BE H2771 COCKPIT TABLE COVERS PORTSIDE + STARBOARD - Ardoise

- Sunbrella+ Acrylic Canvas
- Area to be covered: the teak tray alone

COCKPIT CUSHIONS AND SUN AWNING




BSC050I COCKPIT CUSHIONS - Bora Bora Grey
BSC051I COCKPIT CUSHIONS - Carbon beige




BSC280I COCKPIT TABLE CUSHION / STARBOARD SIDE - Bora Bora Grey or Carbon beige
BSC280I COCKPIT TABLE CUSHION / STARBOARD SIDE - Bora Bora Grey or Carbon beige

BSC230I COCKPIT TABLE CUSHION / PORT SIDE - Bora Bora Grey
BSC231I COCKPIT TABLE CUSHION / PORT SIDE - Carbon beige



Option BSM01 0I/1I FRONT SUNBATHING MATTRESS - Bora Bora Grey or Carbon beige



STANDARD GARAGE CURTAIN



- Canvas in white Stamoïd Light

Serge Ferrari



White F4128-03244

The benefits of STAMOÏD:

- 100 % waterproof: its multi-layer composite material is an impassable water barrier.
- Exceptional durability: STAMOÏD offers unrivalled resistance to UV rays and mildew.
- High resistance to discolouration: thanks to a coating process with colouring in the mass, the Serge Ferrari STAMOÏD range retains its original colour.
- Reduced space requirement: the remarkable flexibility of the composite material used makes handling easier and reduces space requirements during storage.

Light (300 g/m²) and compact, Stamoïd Light is the reference fabric on the market for equipment protection.

Dimension: L= 2600 mm (8'6") / I= 900 mm (2'11")

PAUSE

ANCHORING, DOCKING AND TENDER

BOW THRUSTER & RETRACTABLE STERN THRUSTER

STANDARD: BOW THRUSTER (tunnel, NON proportional)



Thrusters

SE130 tunnel bow/stern thruster 24V

130kg thrust, on/off










Item code: SE130/250T-24V

SE130 is our smallest model in the 250 mm tunnel range with 130-160 kg thrust. Suitable for boats between 42-62 feet. Can be mounted in the bow and stern.

The thruster offers great installation flexibility as it can be mounted at any angle on the tunnel. Additionally, the electric motor can be rotated 90 degrees on the motor bracket.

+ Option D0P17 RETRACTABLE STERN THRUSTER (NON proportional)



SRL100 retract bow/stern thruster 24V

100kg thrust, on/off, low profile










Item code: SRL100/185T-24V

SRL100 is a sturdy retract thruster with 100-116 kg thrust, suitable for boats between 35-55 feet.

The thruster is mounted on a flange and has a fast deployment and retraction time. The unit is compact with bevel gears, making it perfect for boats with limited height space.

A remote control is a popular accessory. See some of the important product and safety features below.

FOLDING CLEATS

STANDARD : FIX ALUMINIUM CLEATS

(x8)



Option STAINLESS STEEL CLEATS (x8)



MOORING KIT**Option BAM05 MOORING KIT**

Mooring kit includes :

- 4 fenders (length 113 cm x diameter 30 cm)
- 6 fenders with fenders (length 88 cm x diameter 30 cm)
- 4 docklines, grey (length 20 m / diameter 22 mm)

ANCHORING KITS



Option BAM1201 ANCHORING KIT WITH STAINLESS STEEL ANCHOR (40kg)

stainless steel anchor 40 kg
70 m of 12 mm chain (ISO) and 50 m of 22 mm rope



STANDARD ELECTRIC WINDLASS



A Electric windlass LEWMAR 24V 2000W B12 IP67,

B Barbotin TECMAR V4/V5 - Chain 12 mm – Line 18/20 mm

C LEWMAR 200 mm (8") Blue Non-Locking Winch Handle

D QUICK Waterproof windlass remote control - 2 LED buttons (FPHRC1002L00D00)

E QUICK Chain counter + STANDARD



GATES IN LIFELINES AND BOARDING LADDER



Option BEE01 LATERAL BOARDING LADDERS
(gates in lifeline = STD)



HYDRAULIC GANGWAY



Option BEP01P HYDRAULIC RETRACTABLE GANGWAY

- Retractable gangway with hydraulic movement, with manual and automatic insertion.
- Stainless steel and teak gangway, with two sections, one telescopic and one adjustable between 15° and 20°, total load of 150 kg / 331 lbs.



Lenght 2,26 m / 164'0"

15 to 20° of inclination



ELECTRIC WASHDOWN PUMP



Option EEB01 ELECTRIC WASHDOWN PUMP **IN THE ANCHOR LOCKER** (fresh and salt water)



Option EEB04 ELECTRIC WASHDOWN PUMP **IN THE GARAGE** (fresh and salt water)


EASY TENDER PACK



+ Option PB11 EASY TENDER PACK

Includes :

- electrical winch with remote
- floor protection,
- rollos
- inflator pump

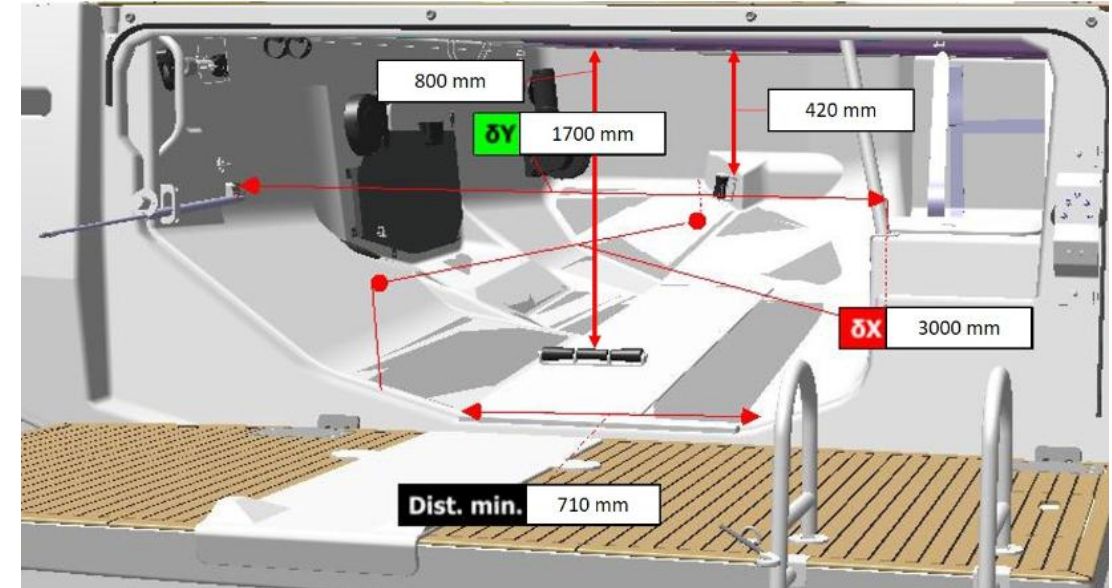

+ Option BEV12 INFLATOR PUMP IN GARAGE (also included inside EASY TENDER PACK)

Fixed version for flush mounting.
Suitable for mounting on the console of the boat or near the garage annexes.
Inflates and deflates.
Automatic stop when the desired pressure is reached.



Model validated for JY 60: AERMARINE ALUSMART 9,5 K

COMPATIBLE TENDER



Model validated for Jeanneau Yachts 60 : **AERMARINE ALUSMART 9,5 K**
Version with console, steering wheel and electric start

Semi-rigid boat with aluminium hull and patented folding transom

- **Length. 2.90 m / 9'6"**
- Width: 1,52 m / 4'11"
- Passenger capacity: 5
- Total weight per sailing order 130-135 kg / 287-298 lbs (15 HP outboard included)
- Foldable front console complete with steering wheel, single cable, battery switch, cigarette lighter socket.
- Maximum outboard power: **15hp** (supplied with Honda or Suzuki)

Contact:

Marcello Menegazzi
PERSONAL TENDER
SINER"G" Srl
Via del lavoro 3/C
48011 Alfonsine (Ravenna)
Italy
Phone: +39 0544 86 41 90
Mail: marcello.menegazzi@gmail.com / aermarine@aermarine.com
Website: www.aermarine.com



CLIMATE CONTROL AND ELECTRICAL SYSTEMS

+ GENERATOR OPTIONAL 7 OR 11 KW

+ Option:
FAVID GENERATOR 7 KVA 230V-50Hz
Ref: 7MDKDL Onan CUMMINS

Frequency: 50 Hz
Power: 7 kW
Weight: 272 kg / 600 lbs



Models and ratings

Model	kW/kVA	Voltage	Amps	Phase	Hz	Engine RPM
7.0MDKDL	7.0/7.0	110/220	63.6/31.8	1	50 Hz	1500
		115/230	60.9/30.4	1	50 Hz	1500
		120/240	58.3/29.2	1	50 Hz	1500

+ Option:
FAVODC GENERATOR 11 KVA 230V-50Hz / **Air conditioning**
Ref: 11MDKDN Onan CUMMINS

Frequency: 50 Hz
Power: 11 kW
Weight: 315 kg / 694 lbs




Models and ratings

Model	kW/kVA	Voltage	Amps	Phase	Hz	Engine RPM
11.0MDKDN	11.0/11.0	110/220	100/50	1	50	1500
		115/230	95.7/47.8	1	50	1500
		120/240	91.7/46	1	50	1500




AIR CONDITIONING AFT OWNER'S CABIN

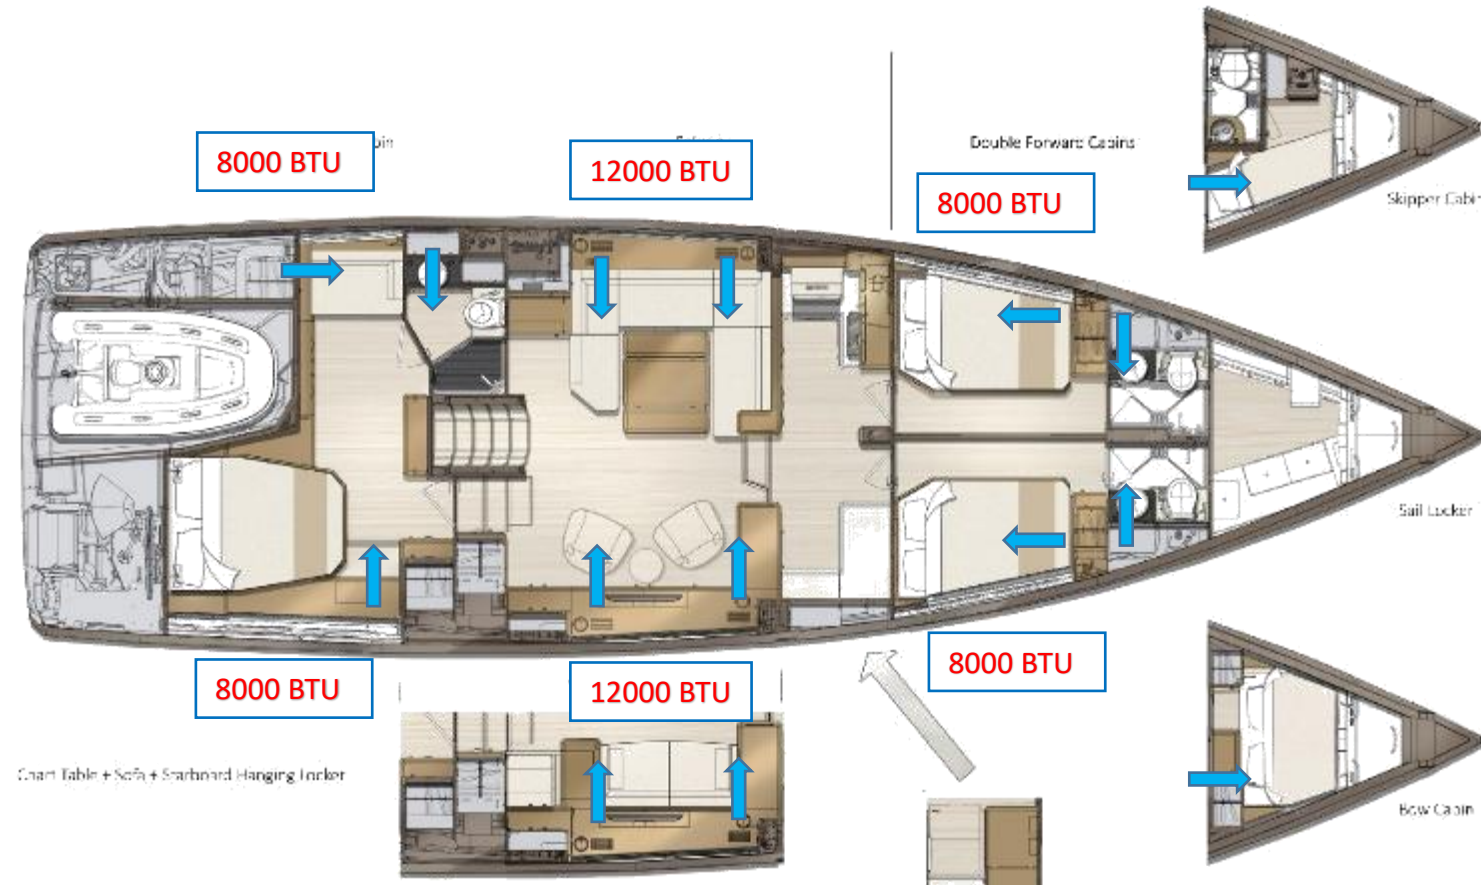

AIR CONDITIONING (3/4)



AIR CONDITIONING : FRONT MASTER CABIN

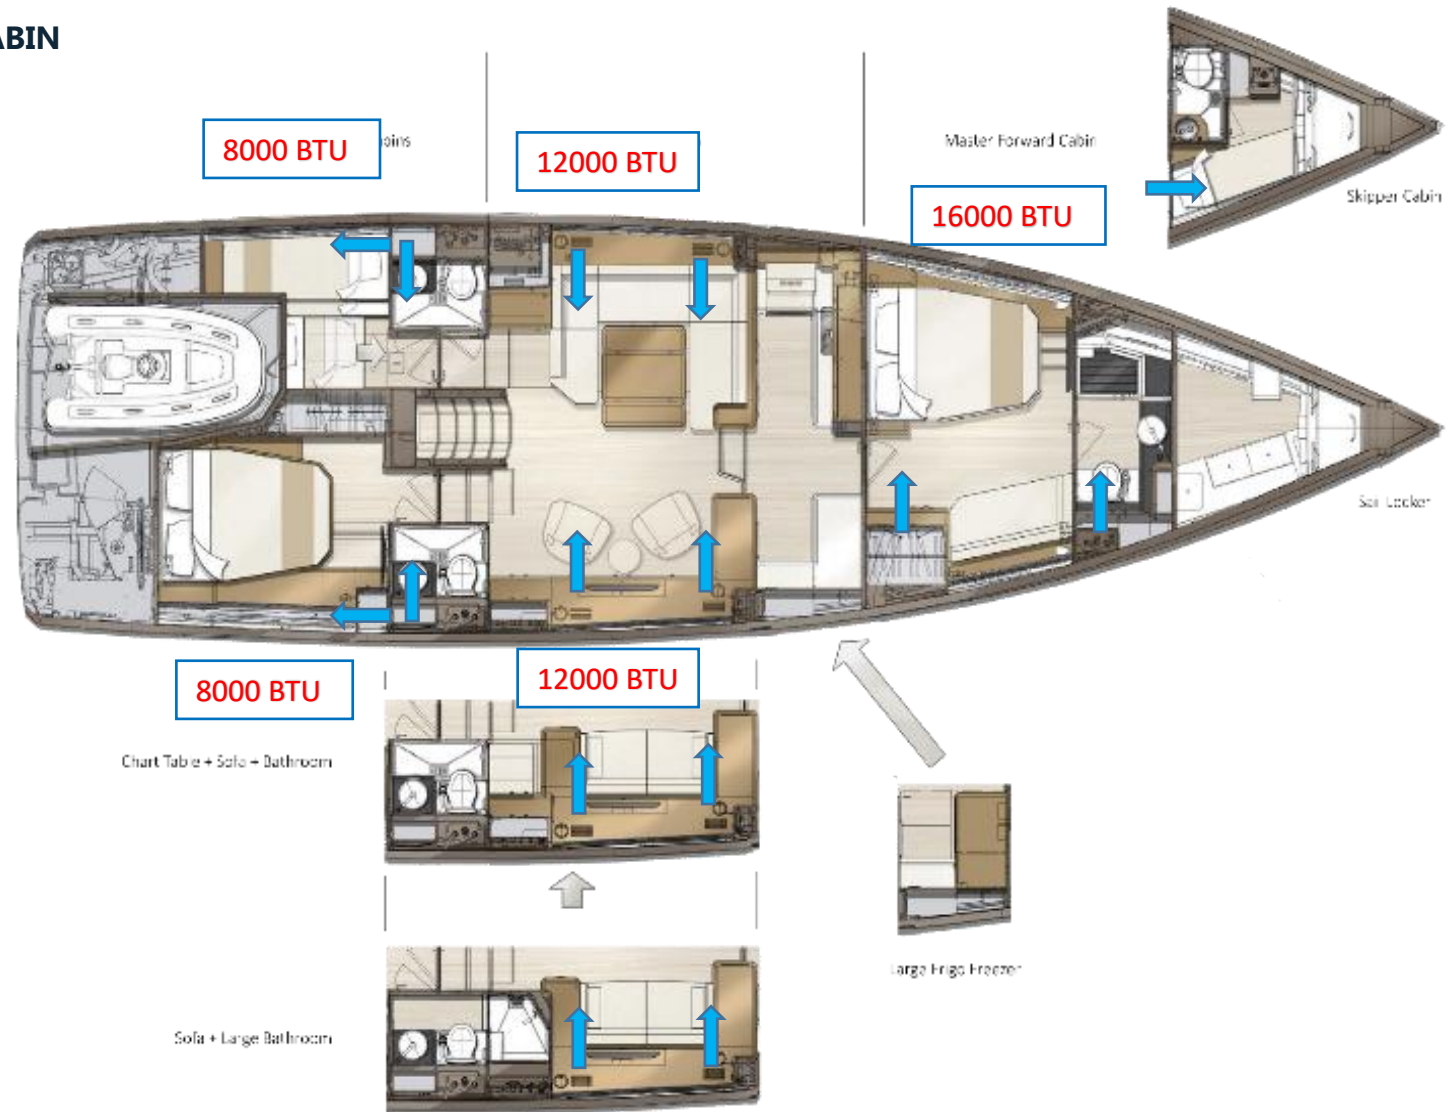

AIR HEATING




OPTION : PUSHED AIR HEATING SYSTEM



3 units directly connected on diesel tank

Take in the fresh air from outside, heat it, and push it into the boat by recycling the unhealthy air

Could be used only in ventilation mode to avoid moisture when leaving the boat

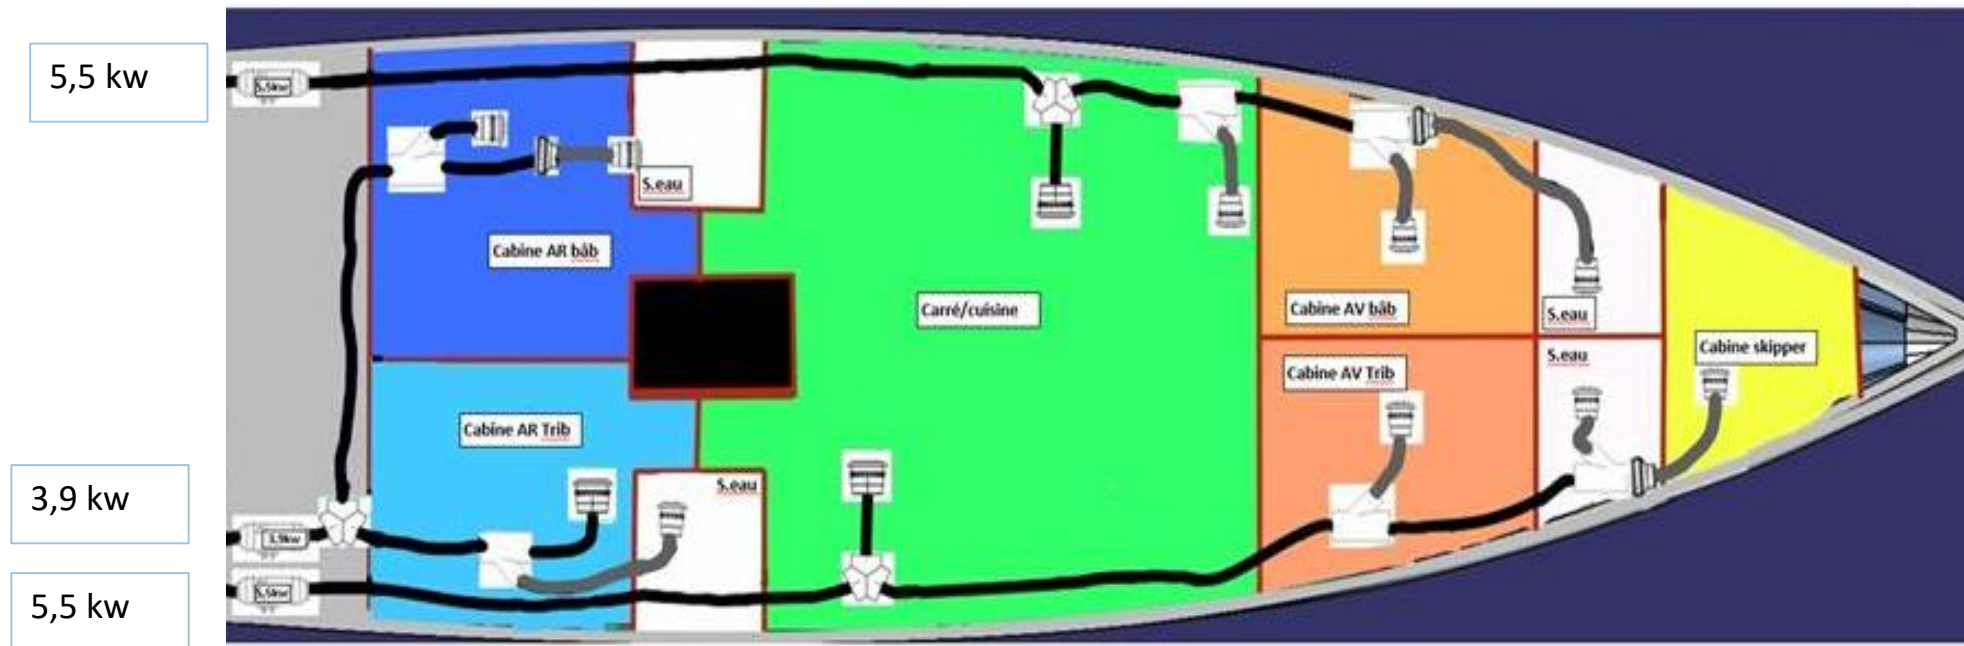

The ducting distribution is equal on all versions

+ **FANS**

+ **OPTION: FANS**

Fan Caframo Sirocco black 12/24 V

- 360° ventilation direction
- Stores compactly when not in use
- 12/24V operation with integrated timer that automatically switches off the fan after 3,6,9 and 12 hours
- 3 speeds

Options:

ICV06 FANS IN SALOON & CABINS *6

ICV06X FAN IN BOW CABIN OR SKIPPER'S CABIN

ICV03WN FAN IN LATERAL CABIN



BATTERIES BANKS

- STANDARD: ENGINE BATTERY

1 BATTERIE EXIDE DUAL AGM EP450 12V 50AH



- STANDARD : DOMESTIC BATTERIES

8 BATTERIES EXIDE DUAL AGM EP1200 12V 140AH

560 Ah en 24 V e



Option MEB31LITHIUM BATTERIES (in place of STD batteries)

8 BATTERIES 105AH 12V LITHIUM SUPER-B
en remplacement des AGM
420 Ah en 24V



GENERATOR BATTERY (option) :

1 BATTERY EXIDE DUAL AGM EP450 12V 50AH

- BOW THRUSTER BATTERIES :

4 BATTERIES EXIDE DUAL AGM EP450 12V 50AH



STERN THRUSTER (option) BATTERIES :

4 BATTERIES EXIDE DUAL AGM EP450 12V 50AH

REMINDER:

AGM battery can deliver 15% of its capacity.

lithium battery can deliver 100% of its capacity.

GALVANIC ISOLATOR

STANDARD GALVANIC ISOLATOR FOR SHORE POWER AIR CONDITIONING 30A 230V 50/60Hz



FAF42 GALVANIC ISOLATOR FOR SHORE POWER 30A 230V-50/60Hz

Model 4531001 MASTERVOLT

FEATURES:

- Ignition Protected
- ABYC - A28 compliant to "fail-safe" requirements
- Engineered to high standards
- High-grade design delivers extended lifespan

For more than forty years, Guest® has been a global leader in harsh environment electrical products. All Guest components feature rugged, corrosion-resistant construction, and meet rigorous global marine, RV and industrial standards

GUEST

INDUCTION CHARGING STATION = STANDARD

Induction charging station SC-CW-01E SCANTRUST

The IPX6 waterproof 12/24 V Qi certified waterproof wireless charging range enables wireless charging for the outdoor environment, without the need for phone charging cables. Designed from the ground up, this is the world's first waterproof wireless charge system created specifically for use onboard, with the unique technology is housed in an IPX6, fully encapsulated and sealed unit.

Working directly with 12/24 V systems, ROKK Wireless is ideal for life on the move and is perfect for sailboat.

Safety

- Foreign object detection system
- Thermal management system
- UV stable

Technical

- IPX6 waterproof sealed unit
- High friction non-slip pad
- Qi-certified
- Marine-grade materials



CONVERTER / INVERTER

STANDARD : MASTERVOLT CONVERTER

81400352 DC Master 24/12-50^a
Supplying 12 V for the instruments such as VHF, AIS, HIFI, radio.



Option MEC49 CONVERTER 24V-230V50 2KVA

Ref 28022000 AC Master 24/2000 W Converter



AUTOMATIC BATTERY SWITCHES



MEF02 AUTOMATIC BATTERY SWITCH

MEF02G AUTOMATIC BATTERY SWITCH (to be added if optional generator chosen)




SALOON

SALOON TABLE

STANDARD : SALOON TABLE

Table L 1,3 x l 1,02 m / 4'3" x 3'4"

Fixed pedestal height, high 0,67 m / 2'2"

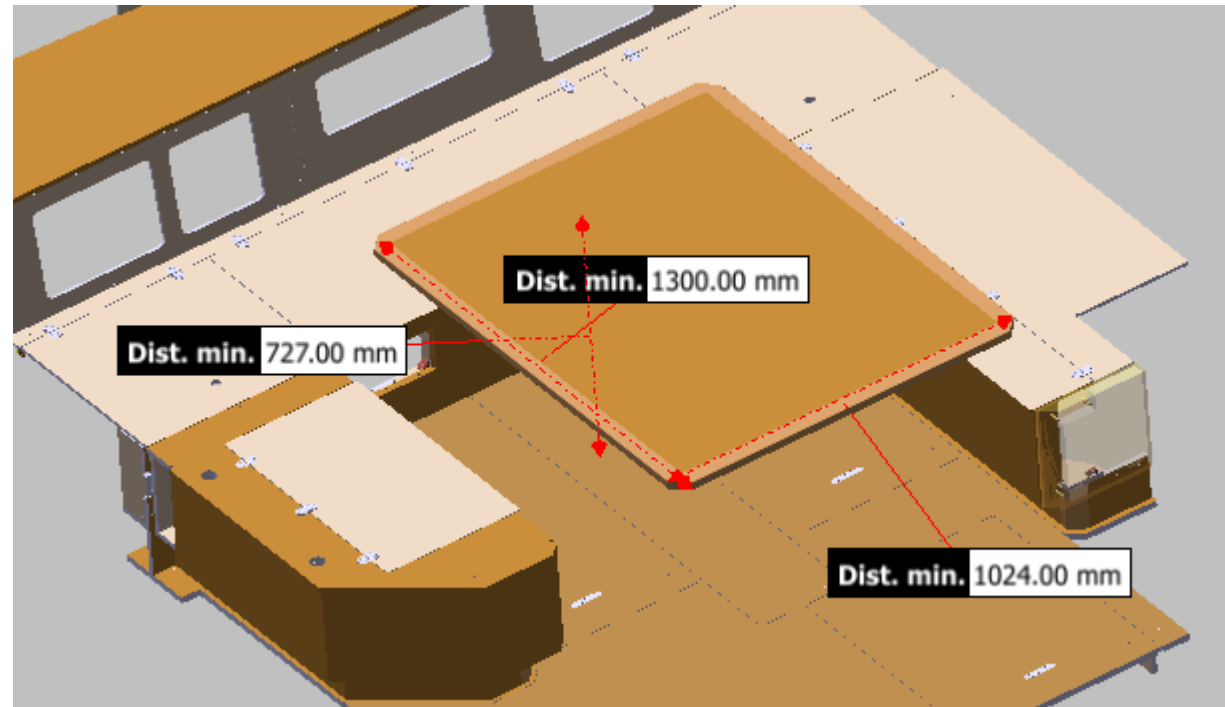

LUXURY SALOON TABLE

+ IIT06G / IIT06R LUXURY FOLDING SALOON TABLE

Folded table L 0,60 x l 1,01 m / 1'11" x 3'3"

Unfolded table L 1,21 x l 1,01 m / 3'11" x 3'3"

Electric pedestal height, high 0,67 m / 2'2"

Electric pedestal height, low 0,40 m / 1'3"

On request, could be possible to convert to a double berth, (CDV)



CARPET IN SALOON



Option ISD0 REMOVABLE CARPET IN THE SALOON

Color



LIGHTING

STANDARD: INDIRECT LIGHTING IN SALOON (DIMMABLE)



SHADES

STANDARD: LUXURY SHADES ON HULL PORTHOLES



: VRS52 ELECTRIC SHADE SALOON ROOF - LITE AND SOFA/CHART
TABLE VERSIONS
ELECTRIC SHADE SALOON ROOF - WITH LATERAL CABIN

With SOMFY remote



CABINS

ELECTRONIC SAFE IN OWNER'S CABINS

+ III012G ELECTRONIC SAFE IN AFT OWNER'S CABIN

ELECTRONIC SAFE DOMETIC MDM281S

Safe with automatic locking system, 8.2 L / 2 US gal

The 4-digit customer code on the LED display and the two sturdy 18 mm steel bolts guarantee the protection of valuables.

- Aesthetic design with illuminated, easy-to-read LED display
- Electronic locking by code entry with 5-minute memory function
- Automatic locking offers protection
- Dimensions: 280 x 165 x 235 mm / 0'11" x 0'6" x 0'9"



SPRING MATTRESS



Option ISC03 SPRING MATTRESS IN OWNER'S CABIN FORWARD / AFT

Thickness 160 mm / 0'6"

	Foam mattress	Spring mattress
Advantages	✓ Reduces pressure ✓ Good body adaptation ✓ Suitable for all sleeping positions ✓ Also suitable for people with back pain	✓ Slightly firmer comfort ✓ High stability ✓ Suitable for people with a large body build. ✓ Particularly suitable for people sleeping on their stomach and back ✓ Very good temperature control
Inconveniences	- X Not suitable for people who perspire a lot - X Not always suitable for restless sleepers - X Mattresses are sometimes too soft	- X Poor sleeping independence - X Heavy enough weight


CARPET IN CABINS

- + ISD07A1/B1 REMOVABLE CARPET IN AFT OWNER'S CABIN
- + ISD06A1 REMOVABLE CARPET IN FRONT OWNER'S CABIN
- + ISD07C1 REMOVABLE CARPET IN THE 2 AFT CABINS


Color



ISD06A1 REMOVABLE CARPET IN FRONT OWNER'S CABIN

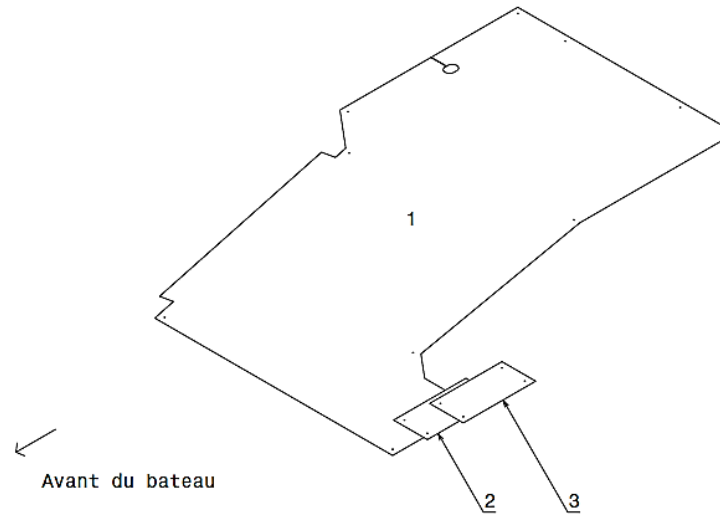

ISD07C1 REMOVABLE CARPET IN THE 2 AFT CABINS

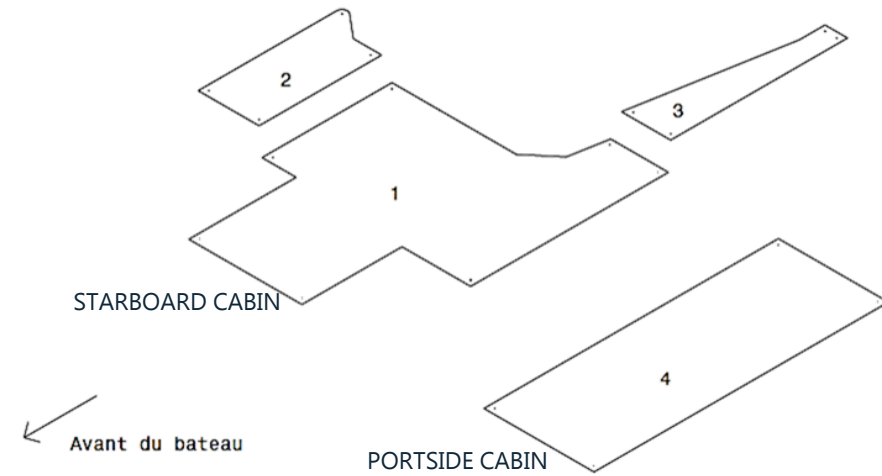

LUXURY LIGHTING IN OWNER'S CABINS


- + FLA23DD/GB LUXURY LIGHTING (LAMP) IN FRONT OWNER'S CABIN
- + FLA23LI/L2 FLA23LI/L2 LUXURY LIGHTING (LAMP) IN AFT OWNER'S CABIN




EQUIPMENT & APPLIANCES

GALLEY – 1 OR 2 FRONT CABIN(S)

1 FRONT MASTER CABIN

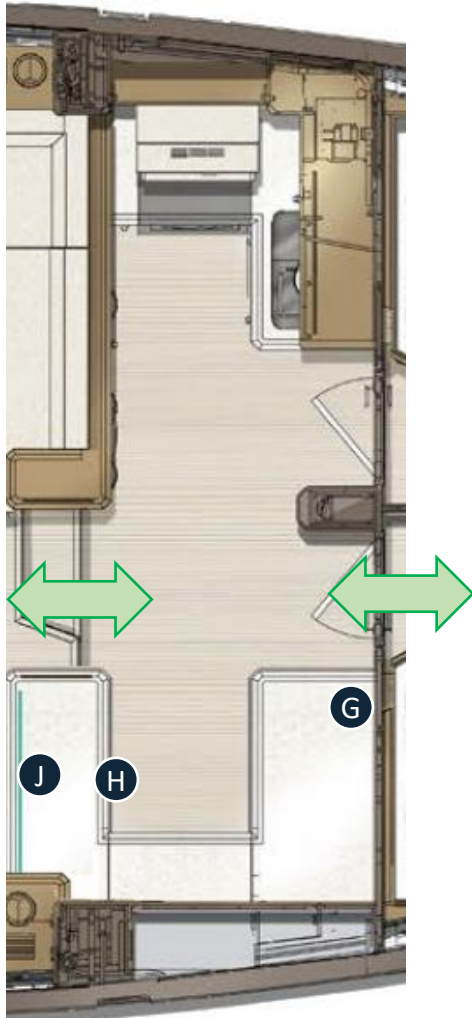

2 FRONT CABINS

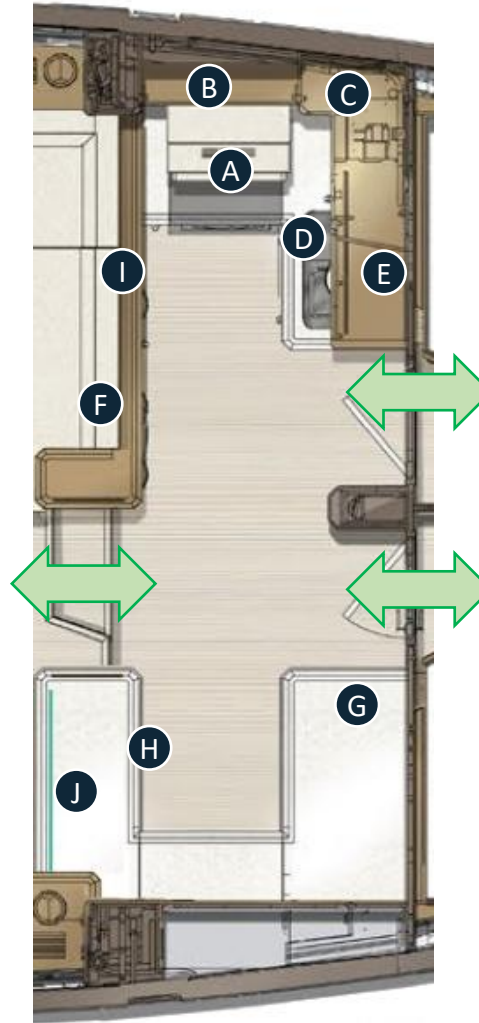


- A 3 burners cook top and oven with grill
- B Cooker hood
- C Space for Nespresso coffee machine
- D 2 Large sinks
- E STD microwave
- F STD drawer fridge 75 L / 20 US gal
- G STD Frigo freezer 144 L / 38 US gal or optional Frigo freezer 300 L / 79 US gal
- H Optional wine fridge
- I Optional dishwasher
- J 2023 model year change = new countertop in standard

BOTTLE STORAGE

STANDARD: BOTTLE STORAGE UNDER THE GALLEY FLOOR ON STARBOARD

Allows you to store 16 inclined bottles of different diameters

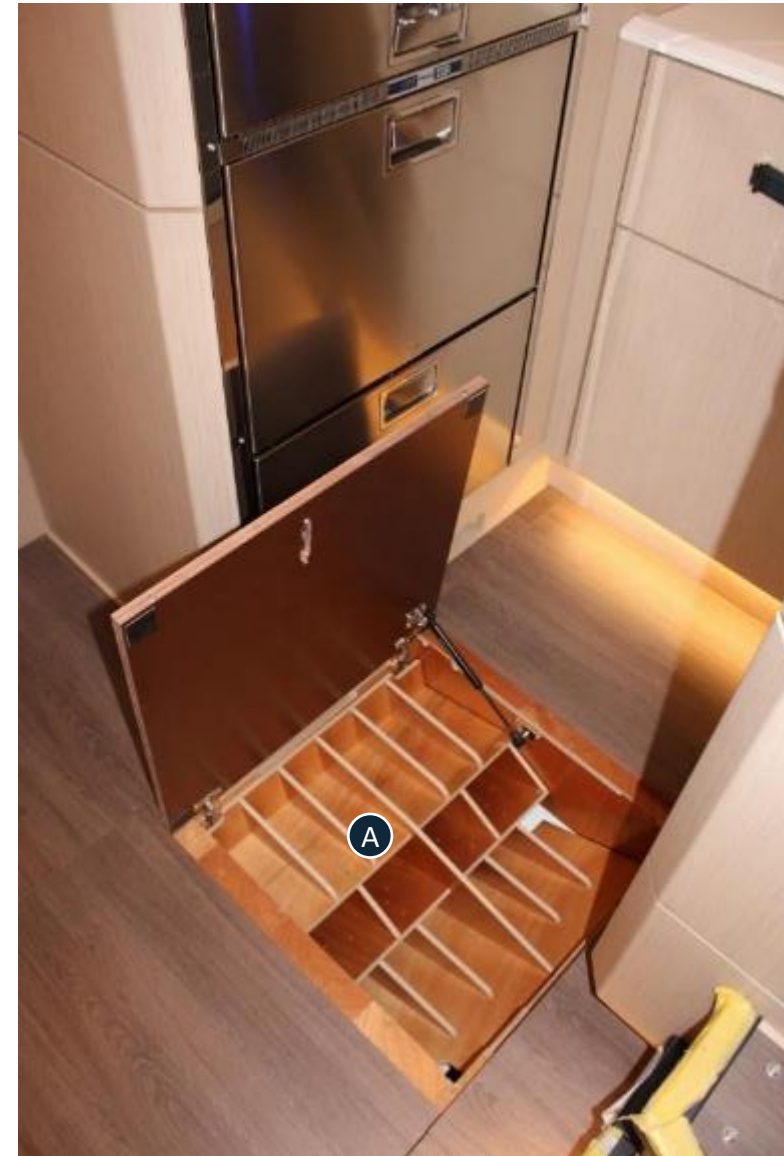

FOOT PUMP FRESH WATER / SEA WATER IN THE GALLEY



EIB54 FOOT PUMP FRESH WATER / SEA WATER IN THE GALLEY



Foot pump MK3 WGP550

- Economical fresh water system for taps
- Ideal for use as a booster pump for an electric pumping system
- Suitable for pumping both fresh and salt water
- Multi-directional pipe inlet and outlet connections make installation easier

Mass: 0.7 kg / 2 lbs

Maximum suction height: 2 m / 6'6"

Maximum drainage height: 3 m / 9'10"

Maximum output flow rate: 15 L/mn / 4 US gal/min



LOCATION OF WATER TANKS

FRESH WATER

STD water capacity: 760L / 201 US gal (in 2 tanks)

FUEL - GASOIL

STD fuel capacity: 318L / 84 US gal




Option MCA03 ADDITIONAL TANK GO 318L 110HP (incompatible with additional 318L water tank)
Option MCA0301 ADDITIONAL TANK GO 318L 150HP (incompatible with additional 318L water tank)

OR



Option EI01BF EXTRA 318 l WATER TANK (front port saloon) (incompatible with additional 318L fuel tank)

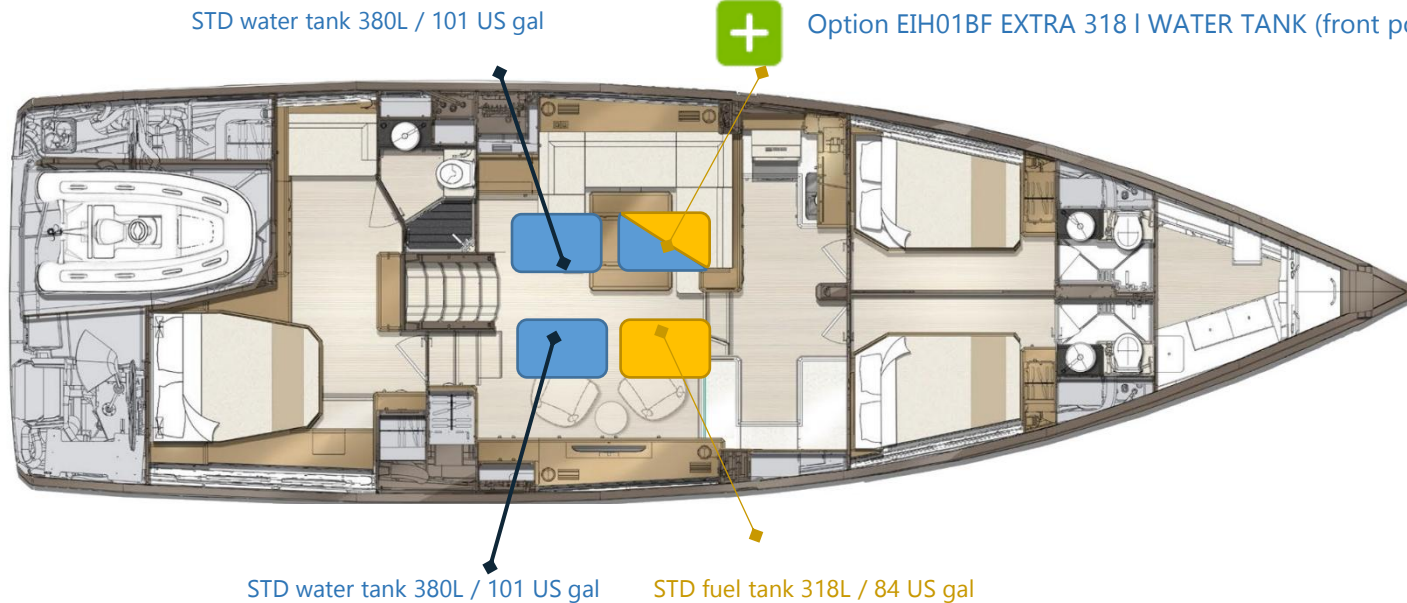

DESSALINATOR



EIJ1004 DESSALINATOR 100L 230V 50 Hz

The patented AC&DC DUO desalinators are the first and only ones worldwide to operate in bi-energy, which makes them the safest and most versatile on the market ("2 in 1", as if you had 2 desalinators): a single inverter allows the motor to be started in 12V or 24V, and in 120V or 230V.

- A **DC** motor to run the watermaker with the energy supplied by the alternator driven by the engine. For example, when there is no wind and the engine is running, there is 12V or 24V at will. In this case, **direct current** operation is interesting (DUO 100: 600 W).
- An **alternating current** motor to operate the watermaker with the energy supplied by the generator. For example, at anchor or when the generator is running, the watermaker is operated on 230V.

The engines engage independently of each other, without electric clutch or manual intervention on the pulleys.

Its low consumption (DUO 100: 6.5A) means that the full power of the charger can be retained for recharging the batteries and for other uses (e.g. hot water tank).

This solution allows you to efficiently optimise the use of energy sources and allows you to produce fresh water in the event of failure of one of the energy sources.

For more than ten years now, DUO watermakers have been fitted as standard by the major shipyards and are the essential choice for sailors.



- With just one button you can operate the machine (AC or DC)
- Efficient use of energy sources available
- DC motor 12 or 24 V
- AC motor 120 or 230 V
- High production: 100 L/hour / 26 Us gal/h
- Integrated automatic rinsing

COOKER HOOD = STANDARD


STANDARD: Series 4 Classic hood 60 cm Stainless steel BOSCH

A

The under-cabinet hood: can be installed under the top cabinet or on the wall, to save space.

Exhaust air flow rate: 350 m³/h to ensure optimum air quality in your galley.

LED lighting: very economical for perfect hob lighting.

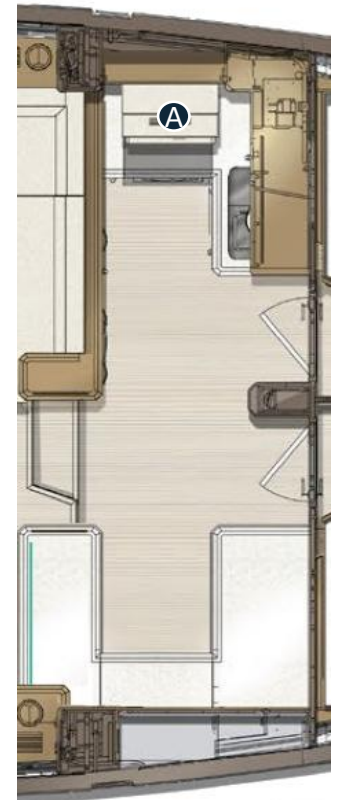

3 BURNERS **STANDARD** COOKER AND OVEN WITH GRILL

STANDARD: GRAND LARGE - 3 BURNERS COOKER AND OVEN WITH GRILL

Number of burners: 3 burners / 1 oven / 1 grill

Oven volume: 19 L / 5 US gal

Power: 1.75 kW - 2.5 kW - 1.5 kW - 1.35 kW

Energy: Butane / Propane 28-30 mbar

Consumption: 491 g/h

Safety: Thermocouple

Pot holders: 2 pairs

Ignition: electronic

Materials: Stainless steel, enamelled furnace

Finish: Gloss

Gross weight: 26,6 Kg / 59 lbs

Marking: CE / AGM / USCG



ELECTRICAL COOKING PLATES AND OVEN



Option IAC10G ELECTRICAL COOKING PLATES AND OVEN

Replaces the STANDARD gaz oven

Electric oven and 3-burner ceramic hob

Model Force 10 F65336 ENO

Voltage 200-250 V

Frequency: 50-60 Hz


Plates power: 3 x 1200 W / 5 Ah

Oven power: 1300 W / 5.4 Ah

Oven volume: 26 L / 7 US gal



FRIDGE - FREEZER - ICEMAKER

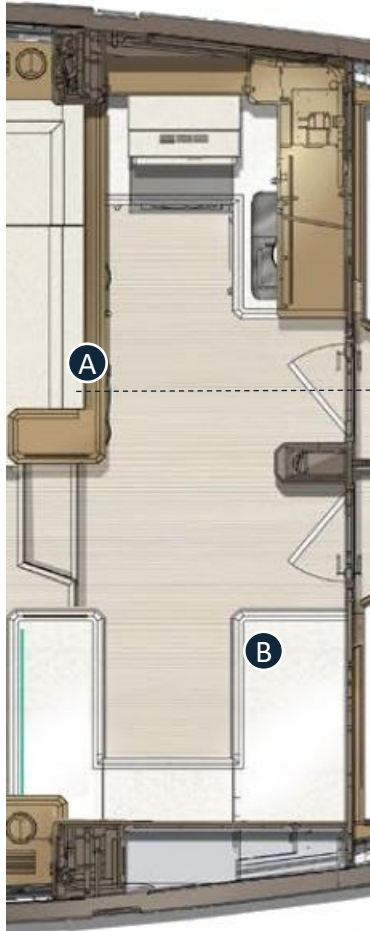

A

STANDARD : VITRIFRIGO DW70 RF -75L/20 US Gal

Steelock locking system
Stainless steel finishes
Temperature controlled by an innovative LED thermostat



IAB05G **FREEZER (75 L)** VITRIFRIGO DW70 BTX – 75L / 20 US Gal



IAI02G **FREEZER WITH ICEMAKER** 220-50 Hz (75L) VITRIFRIGO DW70 BTX IM – 75L



B

STANDARD : FRIGO FREEZER 144L /38 US Gal

VITRIFRIGO DW180 DTX -144L / 38 US Gal

2 drawers: FRIGO 80L/21USGal and FREEZER 64L/17USGal



IAA15G FRIGO FREEZER 300L / 79 US Gal

replaces STD 144L/ 38USGal Frigo/Freezer

VITRIFRIGO DW360 DTX

1 fridge 157L / 42 US gal

2 drawers:

- **Fridge 80L / 21 US gal and**
- **Freezer 64L / 17 US gal**



STANDARD MICROWAVE

A MICROWAVE OVEN 220-50 Hz WIRLPOOL WP201SB



DISWASHER




IAL04G DISHWASHER 230V-50Hz

Located under port saloon seat in galley

Dishwasher ELECTROLUX ESL2500

The right programme for your dishes with every dish
The ideal wash for your dishes, whatever they are.
Choose from 6 programs.

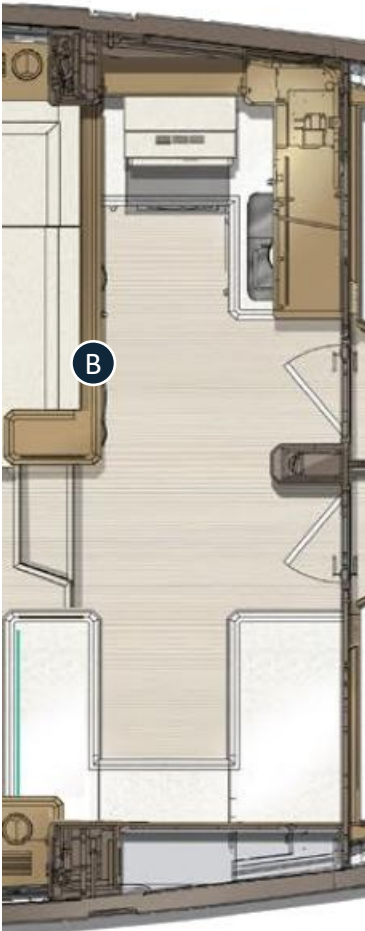

B



WASHING DRYER MACHINE

+ IAL03G/R WASHING/DRYER MACHINE 230V-50H

Located in the saloon, on port side

WASHING DRYING MACHINE 220V 50HZ HAEIR

Haier HWD80-B14939 Washing machine dryer 8-5 kg / 18-11 lbs 1400 RPM

Dimensions HxLxP (cm) 85 x 59,5 x 56




WINE FRIDGE



IAC06G WINE FRIDGE 220V STARBOARD GALLEY (12 bottles) with inverter

VITRIFIGO WINE CABINET DCW46 12 bottles (diameter mm.76 x height mm.315)
Total useful volume 46 L / 12 US gal

Tinted glass (UV protection) and brushed stainless steel finish.
Perfect for storing wine bottles, even for long periods, and are equipped with temperature control with digital thermostat (+4°C +18°C).

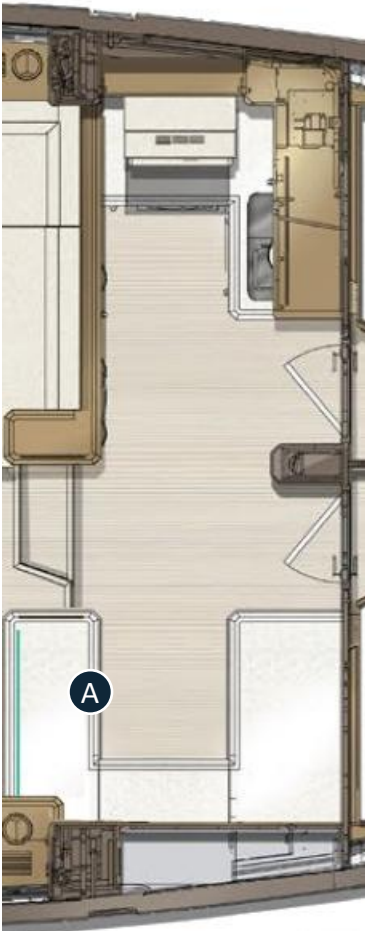


A




INDUCTION CHARGER

Location of the induction charger:

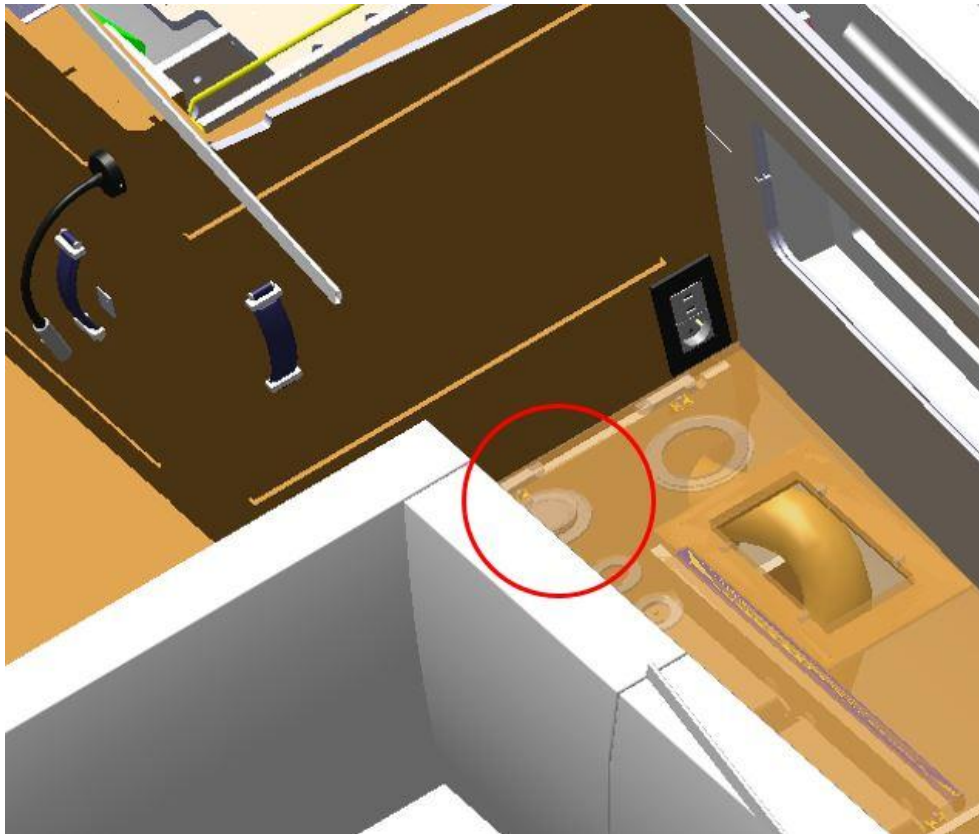


Location of the galvanic isolator:

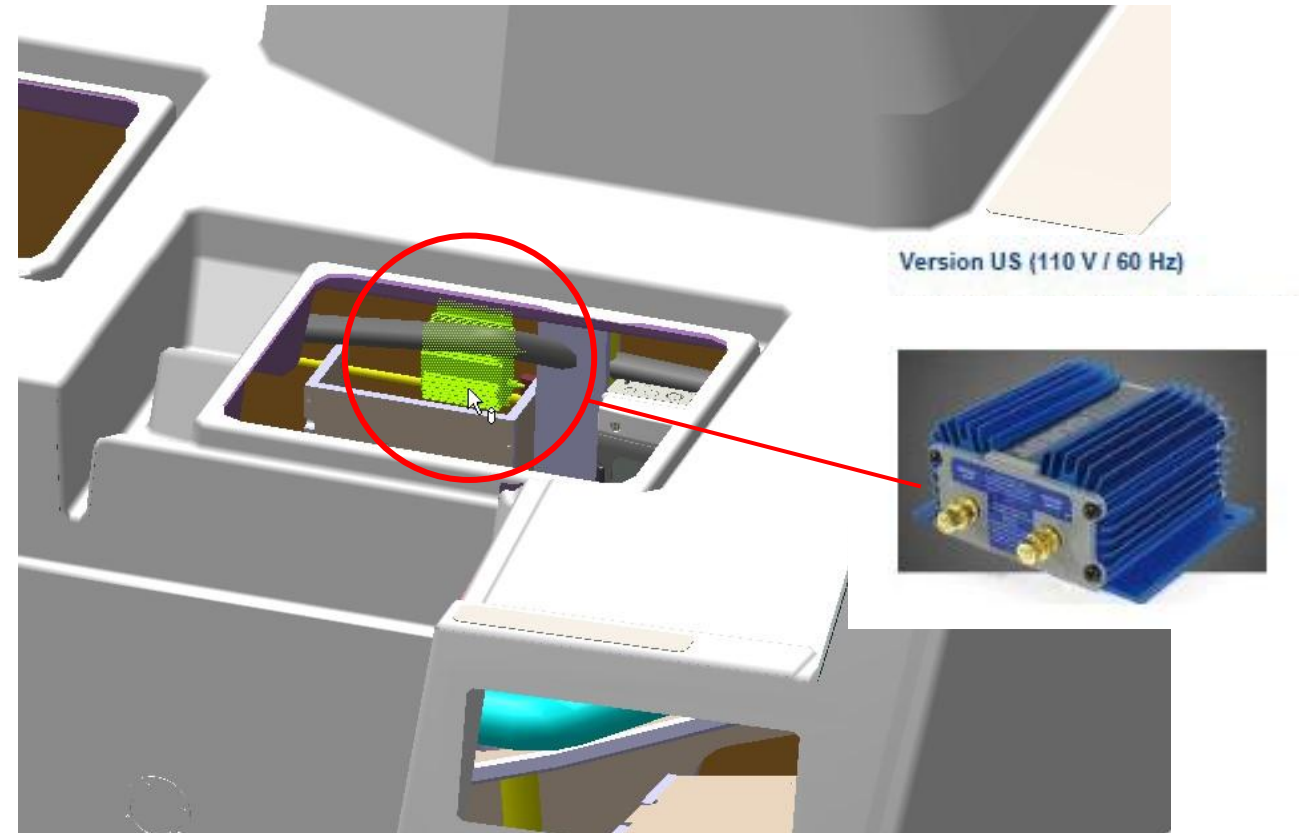

+ CROCKERY

+ OPTION : CROCKERY KIT

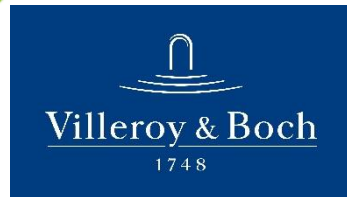

Kit for 6 people

Contains:

- Cutlery – 24 pcs
- 6 dinner plates (27 cm)
- 6 dessert plates (21 cm)
- 6 soup bowl (21 x 18 cm)
- 1 salad bowl (36 x 24 cm)
- 8 wine glasses 55 cL
- 8 water cups 48 cL
- 6 Coffee cups + saucer
- 6 mugs



STANDARD ELECTRICAL WC

STANDARD: ELECTRICAL WC TECMA COMPASS FRESH WATER

TECMA

- Ceramic geometry for perfect fit on sloping walls
- Macerating pump MAC 4: 4 m vertical delivery and 40 m horizontal delivery
- Eco Rocker control panel
- Water consumption between 0.5 and 2.0 L per flush depending on the setting



MECHANICAL ACCESSORIES

FUEL TANKS

FRESH WATER

STD water capacity: 760L / 201 US gal (in 2 tanks)

FUEL - GASOIL


STD fuel capacity: 318L / 84 US gal



Option MCA03 ADDITIONAL TANK GO 318L 110HP (incompatible with additional 318L water tank)

Option MCA0301 ADDITIONAL TANK GO 318L 150HP (incompatible with additional 318L water tank)

ou

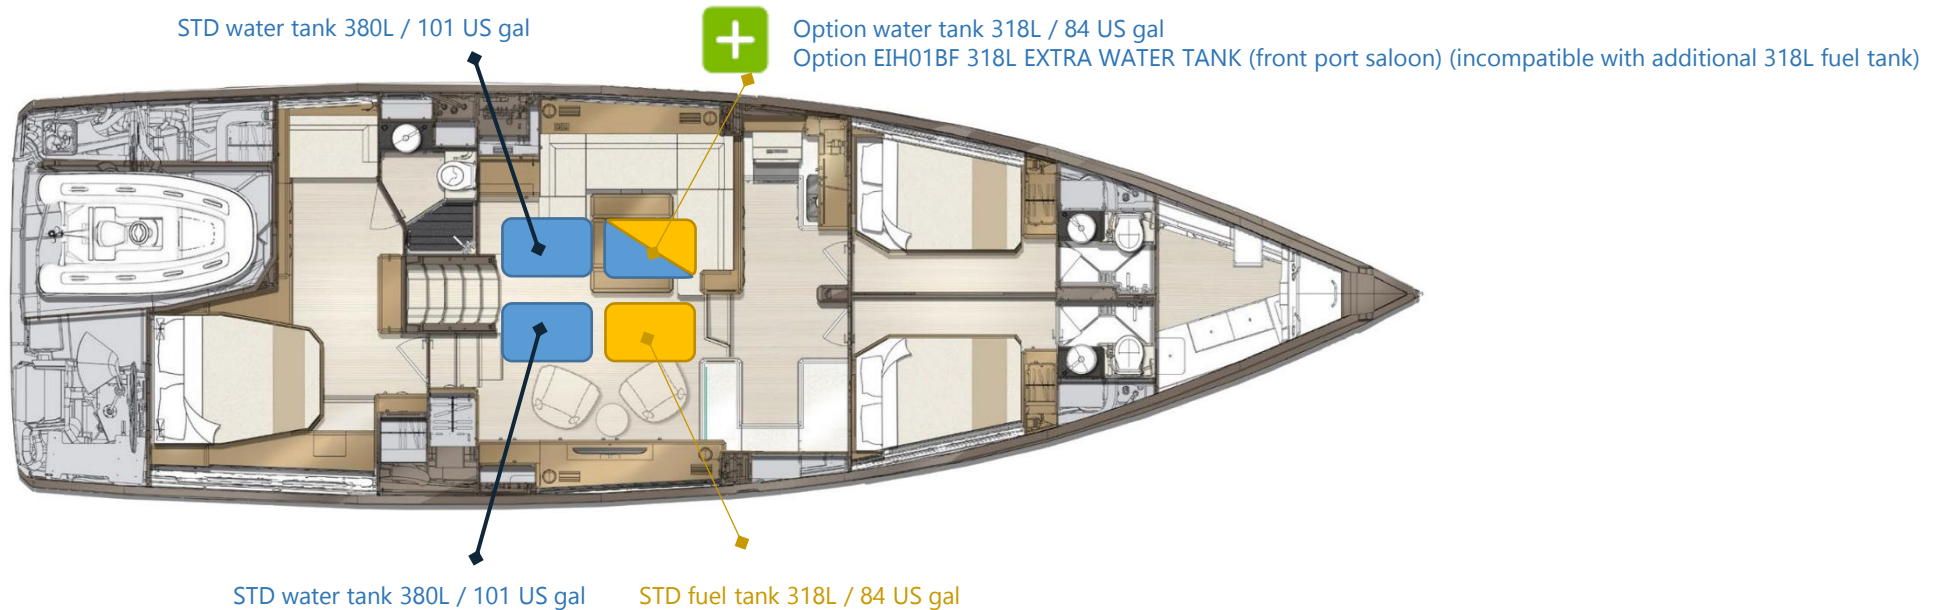



- STANDARD: 150 HP : 3-BLADE FOLDING PROPELLER 23X13 RH40 FOF
FLEX-O-FOLD hydraulic gear box with braking system disk on shaft



*The 3-blade Flexofold folding propeller offers great manoeuvrability and power in both Front and Reverse.
Under sail, the low drag greatly improves the boat's performance with minimal risk of catching lines, nets or algae*

ROPE CUTTER

ROPE CUTTER DELOT

The rope cutter protects your boat's transmission.
It drives and cuts rope, cable and wire.
The DELOT rope cutter, the original for more than 20 years!



MPP09 ROPE CUTTER D40 YANMAR 150 HP

For Yanmar 150 HP → 40 mm (0'1") diameter, reference FD40KS

TV & HIFI

+ TV PREFITTING IN SALOON

RHM7F8G TV PREFITTING IN SALOON INCLUDING TV ANTENNA AND RETRACTABLE ELECTRIC SYSTEM

Located on starboard side of the saloon, compatible for 42" TV set



Remote control (push buttons)



STANDARD FUSION AUDIO PACK IN SALOON & COCKPIT (1/2)



STANDARD AUDIO PACK – SALOON & COCKPIT

Contains :

- Multi zone FUSION APOLLO RA 770 player in saloon
- FUSION MS-SRX400 Amplifier in cockpit
- 4 loudspeakers FUSION PF-FR6030 in saloon (Black for Teak, White for White oak)
- 2 speakers FUSION MS-FR6021 ISO in cockpit

FUSION APOLLO RA 770



System with 4.3" touch screen, multi-source

- AM / FM / Bluetooth / Wifi audio streaming / Party Bus / Digital optical input / USB audio...
- AirPlay® 2 software function for smooth, high-quality sound
- Includes a brand new multi-zone, multi-source reading with the Party Bus
- Audio broadcasting via Wi-Fi technology offers high quality sound with a faster data transfer rate

FUSION MS-SRX400



Audio System

- AM / FM / Bluetooth / Wifi audio streaming / UPnP
- Wireless connection to RA770 and UPnP

FUSION PF-FR6030



- 6" 3-way loudspeaker
- Max. power: 250 W
- Response frequency: 29 Hz - 27 kHz
- Sensitivity: 89 dB

FUSION MS-FR6021 ISO



- 200 W admissible
- Waterproof construction IP65
- 15 cm (0'5") bass-midrange driver, CURV cone

Up to hull 11

FUSION PLAYER + B&W LOUDSPEAKERS IN MASTER CABINS & AFT STARBOARD CABIN (1/2)

+ FUSION PLAYER + B&W LOUDSPEAKERS

Contains :

- FUSION APOLLO RA 770 player
- 2 white B&W M1 MKII Loudspeakers in owner's cabins, only 1 in aft starboard cabin

FUSION APOLLO RA 770



System with 4.3" touch screen, multi-source

- AM / FM / Bluetooth / Wifi audio streaming / Party Bus / Digital optical input / USB audio...
- AirPlay® 2 software function for smooth, high-quality sound
- Includes a brand new multi-zone, multi-source reading with the Party Bus
- Audio broadcasting via Wi-Fi technology offers high quality sound with a faster data transfer rate

B&W M1 MKII



Bowers & Wilkins

This loudspeaker has a very regular bandwidth of 64 Hz to 23 kHz. Within each loudspeaker, 2-way coaxial speaker:

- 25 mm aluminium dome tweeter for the high register (Nautilus tubular load)
- bass/midrange speaker with 100 mm (0'3") diameter (with woven glass fibre membrane)

Dimensions (l x h x p): 114 x 243 x 172 mm / 0'4" x 0'9" x 0'6"


Options:

RHR380G FUSION PLAYER + B&W LOUDSPEAKERS IN FRONT OWNER'S CABIN

RHR3860 FUSION PLAYER + B&W LOUDSPEAKERS IN AFT STARBOARD CABIN

RHR3890 FUSION PLAYER + B&W LOUDSPEAKERS IN AFT OWNER'S CABIN

JEANNEAU 60 YACHTS

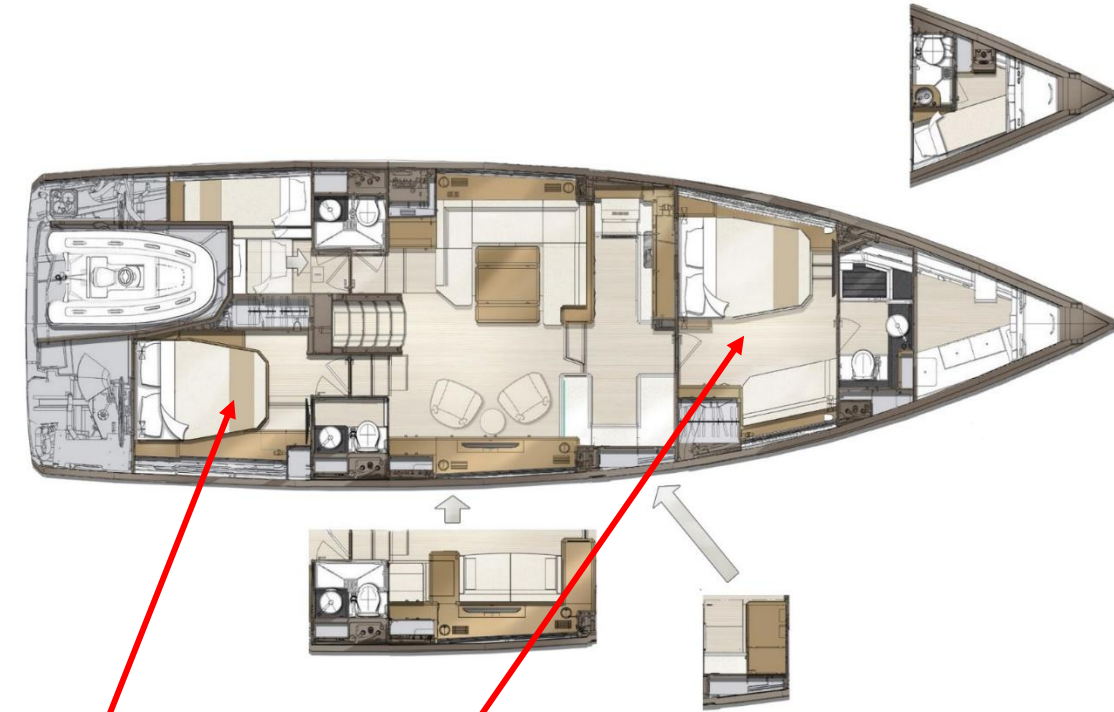

+ RHR380G FUSION PLAYER + B&W LOUDSPEAKERS IN FRONT OWNER'S CABIN


+ RHR3860 FUSION PLAYER + B&W LOUDSPEAKERS IN AFT STARBOARD CABIN




+ RHR3890 FUSION PLAYER + B&W LOUDSPEAKERS IN AFT OWNER'S CABIN

+ TV PREFITTING


+ RHM7S60 TV PREFITTING - STARBOARD AFT CABIN

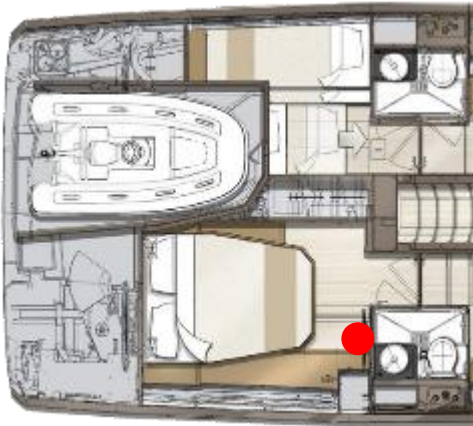

+ RHM7S90 TV PREFITTING - OWNER'S AFT CABIN

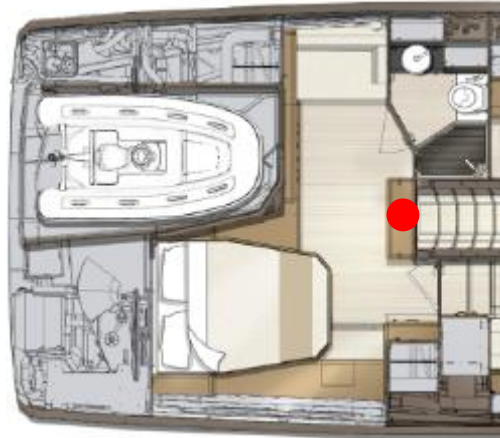

+ RHM7S00 TV PREFITTING - FRONT OWNER'S CABIN

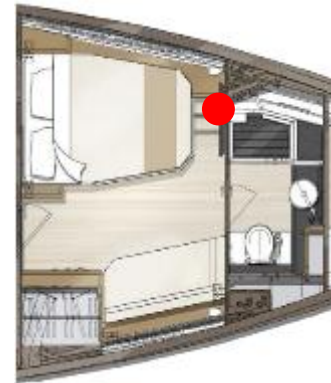

 UPGRADE MULTIMEDIA NETWORK **RHH43 UPGRADE MULTIMEDIA NETWORK (ETHERNET WIFI) included into pack PSV08G/R**


Contains:

- Switch Ethernet 5 ports VIR0226
- Hard disk router kit


For storage of music, movies.... on multimedia hard disk, connected to a router

ELECTRONIC

Jeanneau Yachts 60 Offshore Electronic Pack

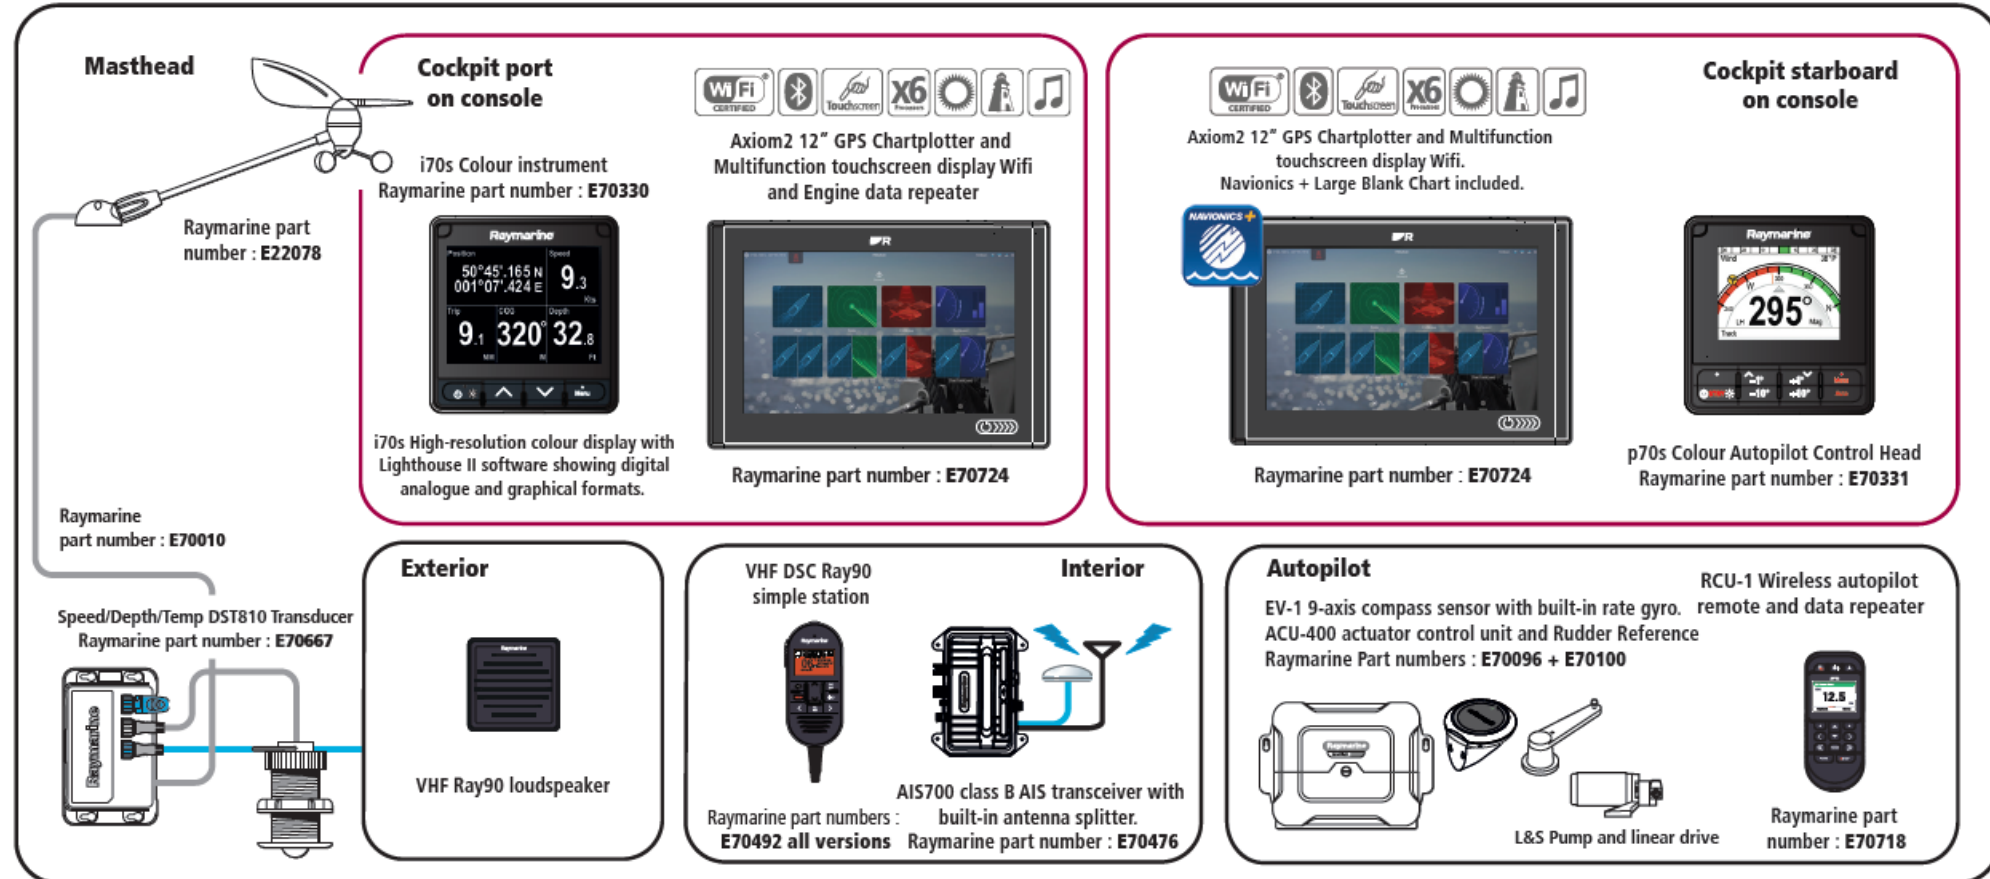

Jeanneau Yachts 60 Ocean Electronic Pack

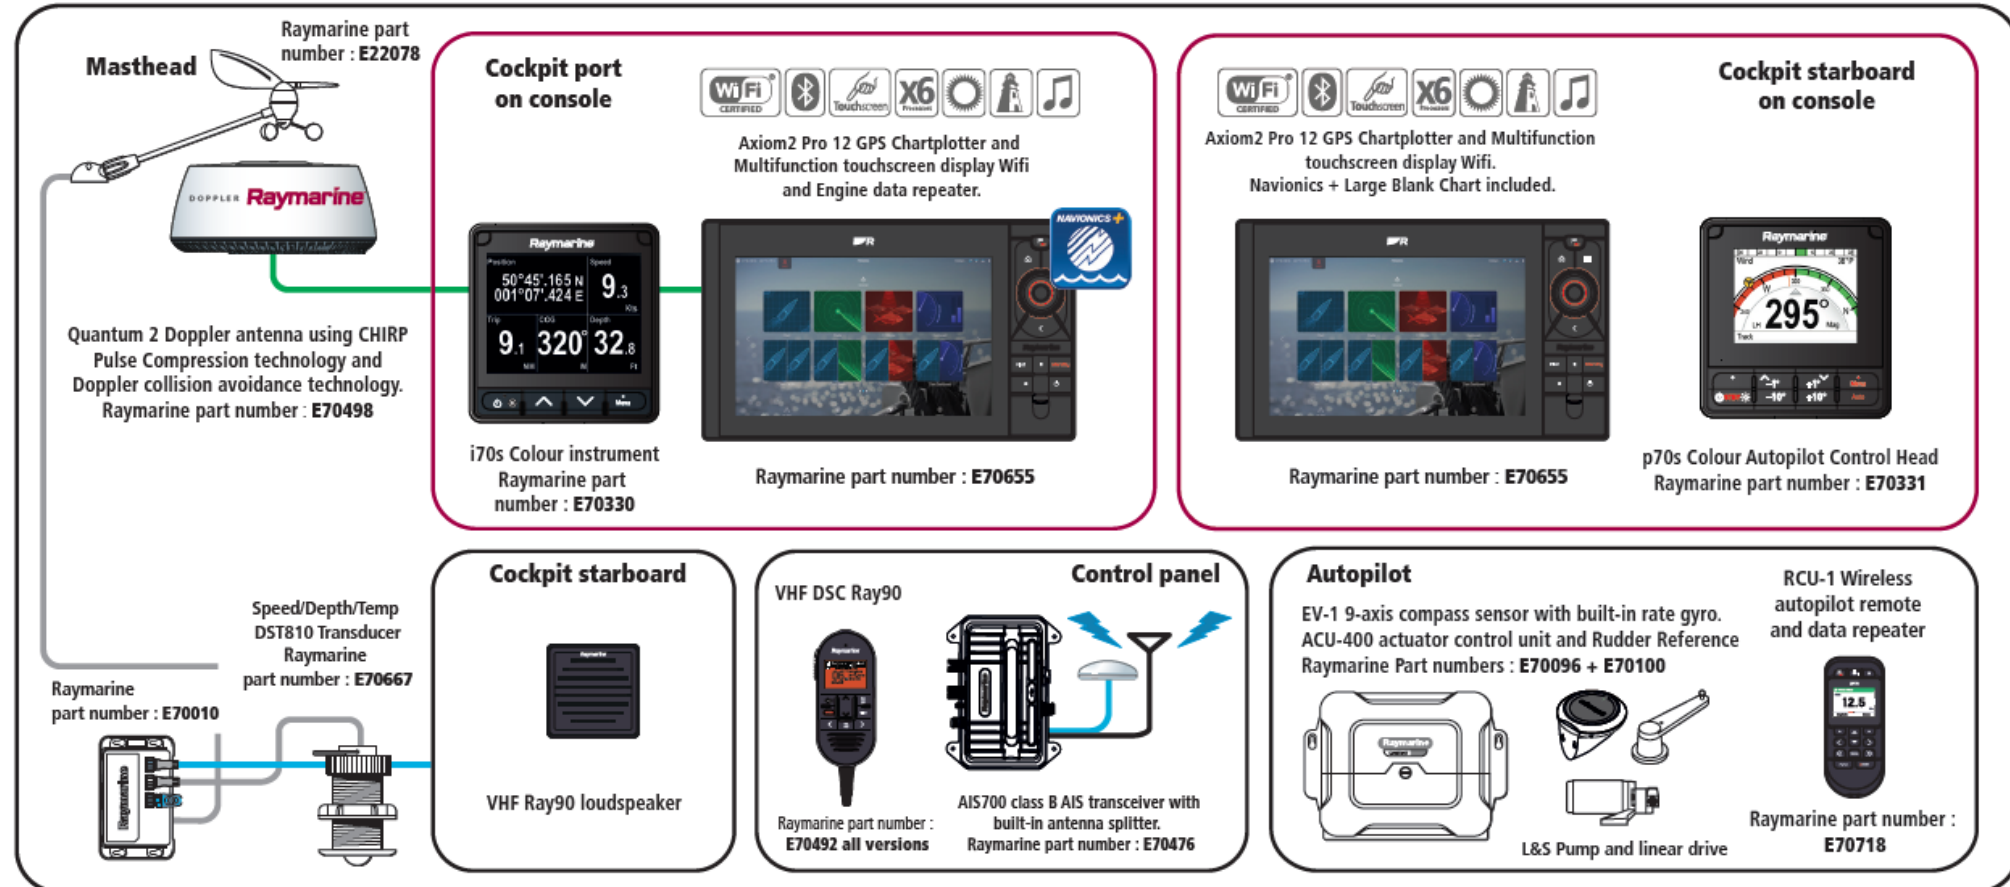

Jeanneau Yachts 60 OPTIONS

Second VHF handset at the Starboard helm Offshore Pack only



Second VHF wired handset
Raymarine part number : A80289

Axiom2 12" Multifunction Glass Bridge MultiTouch Display at the chart table



Axiom2 12" Touchscreen
Multifunction display Wifi.
Raymarine part number : E70724



ClearCruise Augmented Reality Pack for Axiom

*both cameras under the speaders




CAM300 IP Dome Marine Camera
+ AR200 Stabilisation
Part numbers : E70660 + E70537

SERVICES

TRANSPORT AND COMMISSIONNING

+ XMM01CN TRANSPORT COMMISSIONNING AND HANDOVER IN CANET EN ROUSSILLON

XMM01VD TRANSPORT COMMISSIONNING AND HANDOVER IN LA ROCHELLE

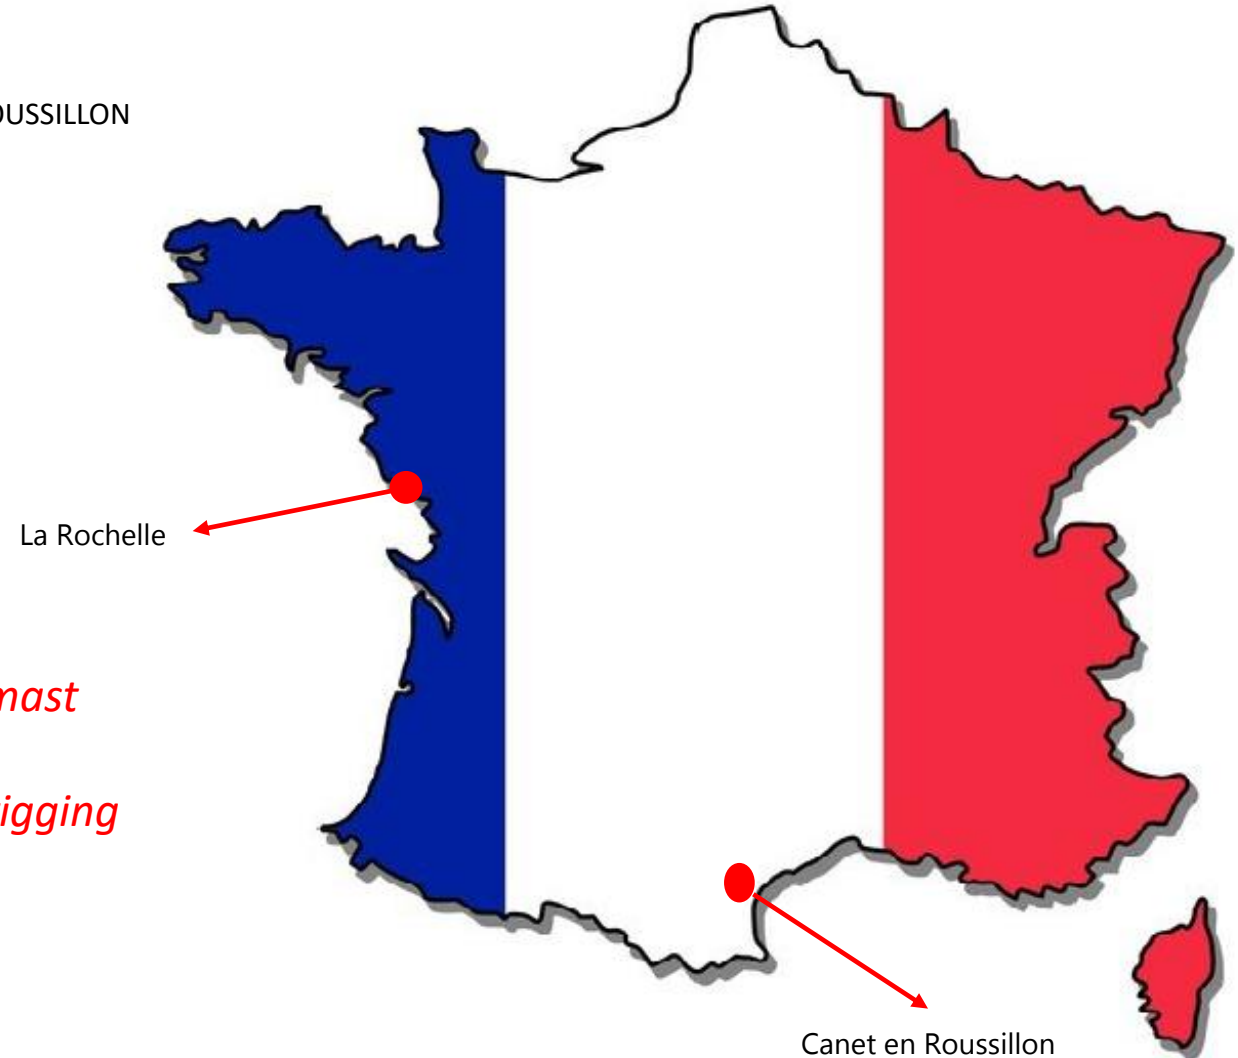

Sparcraft representative is mandatory to fine tune the mast

This is compulsory to active warranty of the mast and rigging

BONNES VENTES

